

# DIMMER COMPATIBILITY CLASSIC P

## BASIC INFORMATION:

### 1. WHAT IS THE PRODUCT CODE AND WHERE DO I FIND IT?

The product code describes the lamp type. It contains 7 letters and digits and is starting with "A". Below an example for the product code of the stamp of the lamp:



### 2. HOW CAN I READ THE FOLLOWING CHARTS?

**Legend:**  
Information about the dimmability of the lamps. Green means good dimmability, yellow means limited dimmability, red means undesired dimmability etc.

List of dimmers tested in laboratory conditions

Legend						PARATHOM PRO PAR16				PARATHOM DIM PAR16			
						50 36°	80 36°	80 36°	80 60°	80 36°	80 36°	80 36°	80 60°
Good dimmability with indicated number of lamps (dimming range greater than 75%)													
Limited dimmability with indicated number of lamps (dimming range smaller than 75%)													
Undesired dimmability													
Not tested													
Dimmer						50 36°		80 36°		80 36°		80 60°	
Brand	Model	Voltage	Power	Type		1 Lamp	4 Lamps	1 Lamp	4 Lamps	1 Lamp	4 Lamps	1 Lamp	4 Lamps
ABB	STD 50-3	230/50Hz	60-500	L		58-0%	57-0%	86-0%	74-0%	85-0%	87-0%	85-0%	87-0%
Altenburger	50_3	230/50Hz				93-0%	92-0%	93-0%	92-0%	92-0%	92-0%	92-0%	92-0%
AURORA	DSP 400	230/50Hz	400	L		90-0%	89-0%	90-0%	89-0%	89-0%	89-0%	89-0%	89-0%
Berker	2861	230/50Hz	50-420	U		89-0%	88-0%	89-0%	88-0%	88-0%	88-0%	88-0%	88-0%
Bticino	L/N/NT4411N	230/50Hz				94-0%	93-0%	94-0%	93-0%	93-0%	92-0%	93-0%	92-0%
Busch-Jaeger	6513 U-102	230/50Hz	420	T		95-2%	93-0%						
Busch-Jaeger	6523 U-102	230/50Hz	40-420	T		95-3%	93-3%	95-3%	93-3%	94-3%	93-3%	94-3%	93-3%
Busch-Jaeger	2250 U	230/50Hz	60-600	L		50-1%	87-1%	93-1%	87-1%	90-1%	87-1%	90-1%	87-1%
Busch-Jaeger	6526 U	230/50Hz				94-40%	93-2%						
CENTURY CONTROL	MULTI DIMMER	230/50Hz	60-600	U		91-0%	90-0%	91-0%	90-0%	90-0%	90-0%	90-0%	90-0%
DimMax	420SL	230/50Hz	200	L/T		93-0%	91-0%	93-0%	91-0%	92-0%	91-0%	92-0%	91-0%
DINUY	RE EL1 LE1	230/50Hz	400	LED		92-0%	91-0%	92-0%	91-0%	91-0%	91-0%	91-0%	91-0%
ELKO	400GLI	230/50Hz				94-3%	91-0%	94-3%	91-0%	92-3%	90-0%	92-3%	90-0%
ELKO	315GLE	230/50Hz	20-315	T		92-3%	90-0%	92-3%	90-0%	91-3%	90-0%	91-3%	90-0%
ELKO	600GLE/I	230/50Hz				92-0%	91-0%	92-0%	91-0%	91-0%	91-0%	91-0%	91-0%
ELKO	600GLI	230/50Hz	40-600	U		92-2%	91-2%	92-2%	91-2%	91-2%	91-2%	91-2%	91-2%

Information about the lamp type

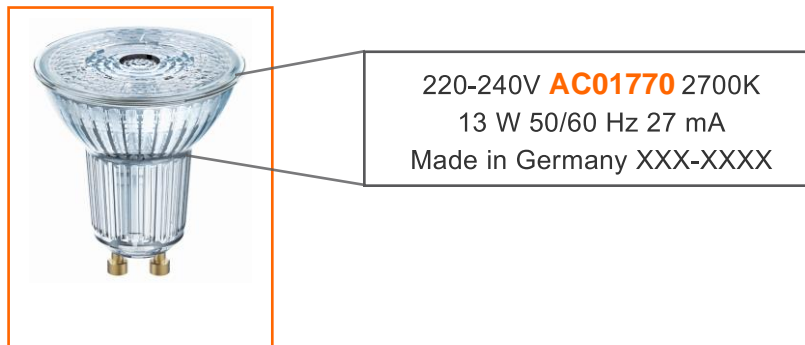
Assessment of the results into categories. Includes the number of lamps and the related dimming range

# DIMMER KOMPATIBILITÄT CLASSIC P

## BASISINFORMATIONEN:

### 1. WAS IST DER PRODUKTCODE UND WO FINDE ICH IHN?

Der Produktcode beschreibt den Lampentyp. Er besteht aus sieben Buchstaben und Ziffern und beginnt mit einem "A". Nachfolgend ein Beispiel eines Produktcodes auf dem Aufdruck der Lampe.



### 2. WIE LESE ICH DIE FOLGENDEN TABELLEN?

Legende: Angaben zur Dimmbarkeit der Lampen. Grün bedeutet eine gute Dimmbarkeit mit der angegebenen Lampenanzahl, gelb bedeutet eine eingeschränkte Dimmbarkeit, rot bedeutet, dass unerwünschtes Dimmverhalten auftreten kann etc.














Liste der getesteten Dimmer

Legend						PARATHOM PRO PAR16 50 36°	PARATHOM PRO PAR16 80 36°	PARATHOM DIM PAR16 80 36°	PARATHOM DIM PAR16 80 60°
Good dimmability with indicated number of lamps (dimming range greater than 75%)									
Limited dimmability with indicated number of lamps (dimming range smaller than 75%)									
Undesired dimmability									
Not tested									
Dimmer						EAN/Basic Code	EAN/Basic Code	EAN/Basic Code	EAN/Basic Code
Brand	Model	Voltage	Power	Type		4058075448728 / AC24597	40580754449107 / AC24600	4058075449282 / AC24603	4058075449220 / AC24606
ABB	STD 50-3	230/50Hz	60-500	L	Dimming range 1 Lamp	58-0%	57-0%	86-0%	74-0%
Altenburger	50_3	230/50Hz			4 Lamps	93-0%	92-0%	93-0%	92-0%
AURORA	DSP 400	230/50Hz	400	L	1 Lamp	90-0%	89-0%	90-0%	89-0%
Berker	2861	230/50Hz	50-420	U	4 Lamps	89-0%	88-0%	89-0%	88-0%
Bticino	L/N/NT4411N	230/50Hz			1 Lamp	94-0%	93-0%	94-0%	93-0%
Busch-Jaeger	6513 U-102	230/50Hz	420	T	4 Lamps	95-2%	93-0%	95-3%	93-3%
Busch-Jaeger	6523 U-102	230/50Hz	40-420	T	1 Lamp	95-3%	93-3%	95-3%	93-3%
Busch-Jaeger	2250 U	230/50Hz	60-600	L	4 Lamps	50-1%	87-1%	93-1%	87-1%
Busch-Jaeger	6526 U	230/50Hz			1 Lamp	94-40%	93-2%	94-40%	93-2%
CENTURY CONTROL	MULTI DIMMER	230/50Hz	60-600	U	4 Lamps	91-0%	90-0%	91-0%	90-0%
DimMax	420SL	230/50Hz	200	L/T	1 Lamp	93-0%	91-0%	93-0%	91-0%
DINUY	RE EL1 LE1	230/50Hz	400	LED	4 Lamps	92-0%	91-0%	92-0%	91-0%
ELKO	400GLI	230/50Hz			1 Lamp	94-3%	91-0%	94-3%	91-0%
ELKO	315GLE	230/50Hz	20-315	T	4 Lamps	92-3%	90-0%	92-3%	90-0%
ELKO	600GLE/I	230/50Hz			1 Lamp	92-0%	91-0%	92-0%	91-0%
ELKO	600GLI	230/50Hz	40-600	U	4 Lamps	92-2%	91-2%	92-2%	91-2%










Angaben zum Lampentyp

Bewertung der Testergebnisse im Ampelsystem. Beinhaltet sowohl die Lampenanzahl als auch den dimmbaren Bereich














## DIMMER COMPATIBILITY CLASSIC P

Legend					PARATHOM PRO CL P 40 FIL	PARATHOM DIM CL P 25 GL FR E27	PARATHOM DIM CL P 25 GL FR E14	PARATHOM DIM CL P 40 Frosted	PARATHOM DIM CL P 40 FIL/GL FR E27/B22d	PARATHOM DIM CL P 40 FIL/GL FR E14	SUPERIOR CL P 40 FIL/GL FR E14	SUPERIOR CL P 40 FIL/GL FR E27	PARATHOM DIM CL P 60 GL FR E14									
	Good dimmability with indicated number of lamps (dimming range greater than 75%)																					
	Limited dimmability with indicated number of lamps (dimming range smaller than 75%)																					
	Undesired dimmability																					
	Not tested																					
					4058075591738 / AC32286 4058075591752 / AC32287	4058075590816 / AC32299	4058075591134 / AC32330	4058075594289 / AC31130	4058075590694 / AC32292 4058075590779 / AC32297 4058075590793 / AC32298	4058075591196 / AC32335 4058075591233 / AC32337	4058075758445 / AC34013 4058075758520 / AC34014 4058075758483 / AC34015 4058075758568 / AC34016	4058075758469 / AC34009 4058075758544 / AC34010 4058075758506 / AC34011 4058075758582 / AC34012	4058075590731 / AC32295									
Dimmer					Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps		
Brand	Model	Voltage range	Power	Type																		
2001	63533	230/50Hz	29,08	T																		
2007	63533	230/50Hz	24,08	T																		
ABB	STD 50-3	230/50Hz	60-500	L	98-6%	98-1%	92-0%	74-0%	97-0%	99-5%	99-5%	77-0%	97-0%	78-0%	100-0%	98-1%	97-1%	98-1%	97-1%	78-0%	84-0%	
Altenburger	50,3	230/50Hz			99-0%			94-0%	97-0%	97-0%			95-0%	85-0%	97-0%	81-0%				98-0%	100-0%	
AURORA	DSP 400	230/50Hz	400	L	98-0%	98-0%		95-0%	98-0%		99-0%	74-0%	91-0%	60-0%	88-0%	98-0%	98-0%	98-0%	98-0%	96-0%	93-0%	
Berker	2861	230/50Hz	50-420	U			95-0%	95-0%	86-0%	98-0%		99-3%	97-0%	85-0%	98-0%					99-0%	100-0%	
Bticino	L/N/NT4411N	230/50Hz			90-0%	96-0%	94-0%	94-0%	97-0%		100-0%	100-0%			95-0%	98-0%	95-0%	98-0%	74-0%	79-0%		
Bticino	L/N/NT4408	230/50Hz					98-0%						87-0%	77-0%						85-0%	86-0%	
bticino	NT4402N	230/50Hz	500	R			100-0%	97-0%	80-0%	97-0%				95-0%	100-0%							
Busch-Jaeger	6513 U-102	230/50Hz	420	T	100-0%	100-0%	95-0%	95-0%	98-0%	98-0%	100-0%	100-0%	98-0%	99-0%	100-0%	100-0%	100-0%	100-0%	100-0%	99-0%	100-0%	
Busch-Jaeger	6523 U-102	230/50Hz	40-420	T	83-0%	92-0%	89-0%	95-0%	92-0%	98-0%			97-0%	98-0%	98-0%	100-0%	94-0%	95-0%	95-0%	76-0%	80-0%	
Busch-Jaeger	2250 U	230/50Hz	60-600	L		98-0%					99-0%				22-0%		99-0%	35-0%	99-0%	99-0%	87-0%	
Busch-Jaeger	6526 U	230/50Hz					78-0%	95-0%		100-0%			97-0%	79-0%	95-0%	95-0%				75-0%	87-0%	
CENTURY CONTROL	MULTI DIMMER	230/50Hz	60-600	U	99-0%	99-0%	74-0%	97-0%	77-0%	97-0%	100-0%	100-0%	82-0%	98-0%	84-0%	98-0%	99-0%	100-0%	99-0%	100-0%	78-0%	89-0%
DimMax	420 SL	230/50Hz	200	L/T	99-0%	100-0%	85-0%	91-0%	100-0%	100-0%	100-0%		92-0%	84-0%	89-0%	74-0%	99-0%	99-0%	99-0%	99-0%	98-0%	100-0%
DINUY	RE ELI LE1	230/50Hz	400	LED	98-6%	98-3%	80-0%	100-0%	100-0%	100-0%	99-0%	99-0%	85-0%	85-0%	85-0%	98-4%	98-3%	98-4%	98-3%	87-0%	91-0%	
ELKO	400GLI	230/50Hz			88-0%	90-0%	92-0%	98-0%							100-0%	92-0%	94-0%	92-0%	94-0%	74-0%	79-0%	
ELKO	315GLE	230/50Hz	20-315	T				95-0%		98-0%	100-0%	100-0%	92-0%	97-0%		99-0%	0-0%	0-0%	0-0%	86-0%	100-0%	
ELKO	600GLE/I	230/50Hz			99-0%	86-0%	92-0%	94-0%	94-0%	98-0%	97-0%	92-0%		98-0%	100-0%	98-0%	97-0%	98-0%	97-0%	82-0%	90-0%	
ELKO	600GLI	230/50Hz	40-600	U	99-0%	53-0%		98-0%			98-0%	99-0%	92-0%	91-0%	89-0%	83-0%	99-0%	99-0%	99-0%	99-0%	100-0%	
ELKO	420GLE/I	230/50Hz	40-420	U	97-0%	99-0%	78-0%	95-0%	80-0%	97-0%	93-0%		89-0%	98-0%	88-0%	100-0%	95-0%		95-0%	75-0%	79-0%	
ELKO	1000LRI	230/50Hz			99-0%	98-0%	95-0%	97-0%	100-0%	100-0%	99-0%		96-0%	91-0%		88-0%	100-0%	98-0%	100-0%	98-0%	86-0%	92-0%
ELKO	630GLE	230/50Hz	20-630	U	100-0%	100-0%	85-0%	92-0%			99-0%	95-0%	92-0%	97-0%	88-0%	99-0%	76-0%	99-0%	76-0%	75-0%	90-0%	
Eitako	EUD61NPN-UC	230/50Hz	5-400	R / L / C	98-0%	98-0%	94-0%	100-0%	100-0%	100-0%	99-0%	100-0%	85-0%	85-0%	85-0%	98-0%	99-0%	98-0%	99-0%	88-0%	93-0%	
Feller	40200.LEDxxx	230/50Hz			100-0%	100-0%	100-0%	94-0%	80-0%	98-0%		99-0%	98-0%	96-0%	98-0%	99-0%	100-0%		100-0%	99-0%	100-0%	
Feller	40600.RLC	230/50Hz	20-600	U	99-0%	86-0%	92-0%	94-0%	94-0%	98-0%	97-0%	92-0%		98-0%		100-0%	98-0%	97-0%	98-0%	97-0%	82-0%	90-0%
Feller	40600.RC	230/50Hz			100-0%	100-0%	85-0%	92-0%			99-0%	95-0%	92-0%	97-0%	88-0%	99-0%	76-0%	99-0%	76-0%	75-0%	90-0%	
Feller	40600.RL	230/50Hz			99-0%	53-0%		98-0%			98-0%	99-0%	92-0%	91-0%	89-0%	83-0%	99-0%	99-0%	99-0%	99-0%	98-0%	100-0%
Feller	40420.RLC	230/50Hz			97-0%	99-0%	78-0%	95-0%	80-0%	97-0%	93-0%		89-0%	98-0%	88-0%	100-0%	95-0%		95-0%	75-0%	79-0%	
Feller	31000	230/50Hz			99-0%	98-0%	95-0%	97-0%	100-0%	100-0%	99-0%		96-0%	91-0%		88-0%	100-0%	98-0%	100-0%	98-0%	86-0%	92-0%














## DIMMER COMPATIBILITY CLASSIC P

Legend					PARATHOM PRO CL P 40 FIL	PARATHOM DIM CL P 25 GL FR E27	PARATHOM DIM CL P 25 GL FR E14	PARATHOM DIM CL P 40 Frosted	PARATHOM DIM CL P 40 FIL/GL FR E27/B22d	PARATHOM DIM CL P 40 FIL/GL FR E14	SUPERIOR CL P 40 FIL/GL FR E14	SUPERIOR CL P 40 FIL/GL FR E27	PARATHOM DIM CL P 60 GL FR E14										
Good dimmability with indicated number of lamps (dimming range greater than 75%)																							
Limited dimmability with indicated number of lamps (dimming range smaller than 75%)																							
Undesired dimmability																							
Not tested																							
					EAN / Basic Code	EAN / Basic Code	EAN / Basic Code	EAN / Basic Code	EAN / Basic Code	EAN / Basic Code	EAN / Basic Code	EAN / Basic Code	EAN / Basic Code										
					4058075591738 / AC32286 4058075591752 / AC32287	4058075590816 / AC32299	4058075591134 / AC32330	4058075594289 / AC31130	4058075590694 / AC32292 4058075590779 / AC32297 4058075590793 / AC32298	4058075591196 / AC32335 4058075591233 / AC32337	4058075758445 / AC34013 4058075758520 / AC34014 4058075758483 / AC34015 4058075758568 / AC34016	4058075758469 / AC34009 4058075758544 / AC34010 4058075758506 / AC34011 4058075758582 / AC34012	4058075590731 / AC32295										
Dimmer					Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps			
Brand	Model	Voltage range	Power	Type																			
Gira	226200	230/50Hz			90-2%	96-0%		95-0%		97-0%	92-0%	100-0%	85-0%	97-0%	80-0%	100-0%	95-3%	98-0%	95-3%	98-0%	82-0%	86-0%	
Gira	030700	230/50Hz	20-525	T	100-0%	100-0%		95-0%	94-0%	98-0%	98-0%	100-0%	98-0%	96-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	99-0%	100-0%	
Gira	117600	230/50Hz	50-420	U				98-0%	95-0%	100-0%	98-0%		100-0%	97-0%	100-0%	99-0%					99-0%		
Gira	238500	230/50Hz						95-0%	97-0%	98-0%	100-0%		99-0%	99-0%	100-0%	100-0%					99-0%	100-0%	
Gira	217400	230/50Hz	4X20-250	KNX-U	99-33%	99-23%		100-0%		100-0%	99-30%	99-0%	81-0%	83-0%	81-0%	83-0%	98-29%	99-24%	98-29%	99-24%	86-0%	94-0%	
Hager	WUD87	230/50Hz	400	LED-U	99-0%	87-0%		92-0%	89-0%		99-0%	94-0%	77-0%	82-0%	82-0%	100-0%	94-0%	83-0%	94-0%	83-0%	79-0%	91-0%	
Hamilton	KP1X40	230/50Hz	400					89-0%	95-0%	80-0%			74-0%	96-0%	75-0%	100-0%					82-0%	94-0%	
Hugo Müller	paladin 872110 led	230/50Hz			98-6%	98-3%		80-0%	100-0%	100-0%	99-0%	99-0%			85-0%	85-0%	98-4%	98-3%	98-4%	98-3%	87-0%	91-0%	
Jung	225 NVDE	230/50Hz	20-500	L	90-2%	96-0%		95-0%		97-0%	92-0%	100-0%	85-0%	97-0%	80-0%	100-0%	95-3%	98-0%	95-3%	98-0%	82-0%	86-0%	
Jung	225 TDE	230/50Hz			100-0%	100-0%		95-0%	94-0%	98-0%	98-0%	100-0%	98-0%	96-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	99-0%	100-0%	
Jung	254 UDIE1	230/50Hz						98-0%	95-0%	100-0%	98-0%		100-0%	97-0%	100-0%	99-0%					99-0%		
Jung	1224 LEDUDE	230/50Hz		LED				95-0%	97-0%	98-0%	100-0%		99-0%	99-0%	100-0%	100-0%					99-0%	100-0%	
Jung	3904 REGHE	230/50Hz			99-33%	99-23%		100-0%		100-0%	99-30%	99-0%			81-0%	83-0%	98-29%	99-24%	98-29%	99-24%	86-0%	94-0%	
Legrand	665114	230/50Hz	400	U	90-0%	96-0%		94-0%	94-0%	97-0%					95-0%	98-0%	95-0%	98-0%	98-0%	74-0%	79-0%		
Legrand	574319/574339	230/50Hz	400	U	90-0%	96-0%		94-0%	94-0%	97-0%					95-0%	98-0%	95-0%	98-0%	98-0%	74-0%	79-0%		
Legrand	572239/572739	230/50Hz	400	U	90-0%	96-0%		94-0%	94-0%	97-0%					95-0%	98-0%	95-0%	98-0%	98-0%	74-0%	79-0%		
Legrand	078407/079207	230/50Hz	400	U	90-0%	96-0%		94-0%	94-0%	97-0%					95-0%	98-0%	95-0%	98-0%	98-0%	74-0%	79-0%		
Legrand	048869/048871	230/50Hz	400	U	90-0%	96-0%		94-0%	94-0%	97-0%					95-0%	98-0%	95-0%	98-0%	98-0%	74-0%	79-0%		
Legrand	067083/048869	230/50Hz	400	U	90-0%	96-0%		94-0%	94-0%	97-0%					95-0%	98-0%	95-0%	98-0%	98-0%	74-0%	79-0%		
Legrand	770061	230/50Hz	400	RL				97-0%	98-0%	100-0%	100-0%		82-0%		81-0%	83-2%					86-0%	90-0%	
Legrand	099314	230/50Hz	300	RL				94-0%	95-0%		89-0%		74-0%	85-0%		82-0%					77-0%	84-0%	
Legrand	770062	230/50Hz	400	RLC	99-0%	99-0%		94-0%		97-0%	99-0%	99-0%			100-0%	100-0%					98-0%	100-0%	
Legrand	078405	230/50Hz	600	RL				98-0%			100-0%		75-0%	87-0%	77-0%						85-0%	86-0%	
MASTER	DM-DGL	230/50Hz	1000	U / LED				97-0%	97-0%	97-2%	97-0%	99-43%		77-0%	85-0%	77-0%	85-0%	98-41%		98-41%	98-47%	86-0%	92-0%
MASTER	DM-2500	230/50Hz	2500	U / LED	98-0%	98-0%		98-0%	74-0%	85-0%	99-0%	99-0%	74-0%	83-0%		95-0%	98-0%	98-0%	98-0%	98-0%	52-0%	100-0%	
Merten	MEG5136-0000	230/50Hz						95-0%		98-0%	100-0%	100-0%		97-0%		99-0%	0-0%	0-0%	0-0%	0-0%	86-0%	100-0%	
Merten	MEG5134-0000	230/50Hz			100-0%	100-0%		100-0%	94-0%	80-0%	98-0%		99-0%	98-0%	96-0%	98-0%	99-0%	100-0%	100-0%		99-0%	100-0%	
Merten	MEG5139-0000	230/50Hz			99-0%	86-0%		92-0%	94-0%	94-0%	98-0%	97-0%		92-0%	100-0%	98-0%	97-0%	98-0%	97-0%		82-0%	90-0%	
Merten	MEG5137-0000	230/50Hz			100-0%	100-0%		85-0%	92-0%				99-0%	95-0%	92-0%	97-0%	88-0%	99-0%	76-0%	99-0%	75-0%	90-0%	
Merten	MEG5133-0000	230/50Hz			99-0%	53-0%			98-0%				98-0%	99-0%	92-0%	91-0%	89-0%	83-0%	99-0%	99-0%	99-0%	98-0%	100-0%
Merten	MEG5138-0000	230/50Hz			97-0%	99-0%		78-0%	95-0%	80-0%	97-0%	93-0%		89-0%	98-0%	88-0%	100-0%	95-0%		95-0%	75-0%	79-0%	

# DIMMER COMPATIBILITY CLASSIC P

Legend					PARATHOM PRO CL P 40 FIL	PARATHOM DIM CL P 25 GL FR E27	PARATHOM DIM CL P 25 GL FR E14	PARATHOM DIM CL P 40 Frosted	PARATHOM DIM CL P 40 FIL/GL FR E27/B22d	PARATHOM DIM CL P 40 FIL/GL FR E14	SUPERIOR CL P 40 FIL/GL FR E14	SUPERIOR CL P 40 FIL/GL FR E27	PARATHOM DIM CL P 60 GL FR E14										
	Good dimmability with indicated number of lamps (dimming range greater than 75%)																						
	Limited dimmability with indicated number of lamps (dimming range smaller than 75%)																						
	Undesired dimmability																						
	Not tested																						
					4058075591738 / AC32286 4058075591752 / AC32287	4058075590816 / AC32299	4058075591134 / AC32330	4058075594289 / AC31130	4058075590694 / AC32292 4058075590779 / AC32297 4058075590793 / AC32298	4058075591196 / AC32335 4058075591233 / AC32337	4058075758445 / AC34013 4058075758520 / AC34014 4058075758483 / AC34015 4058075758568 / AC34016	4058075758469 / AC34009 4058075758544 / AC34010 4058075758506 / AC34011 4058075758582 / AC34012	4058075590731 / AC32295										
Dimmer					Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps			
Brand	Model	Voltage range	Power	Type																			
Merten	MEG 5170-0300	230/50Hz	10-200	U	100-0%		98-0%	92-0%	83-0%	89-0%		63-0%	65-0%	85-0%	88-0%	88-0%			0-0%	77-0%	94-0%		
Merten	MEG 5131	230/50Hz	40-400	L	100-0%	86-0%	94-0%	100-0%	93-0%	100-0%	97-0%	92-0%	63-0%	83-0%	64-0%	81-0%	98-0%	96-0%	98-0%	96-0%	82-0%	91-0%	
Merten	MEG 5132	230/50Hz			100-0%	86-0%	94-0%	100-0%	93-0%	100-0%	97-0%	92-0%	63-0%	83-0%	64-0%	81-0%	98-0%	96-0%	98-0%	96-0%	82-0%	91-0%	
Merten	MEG 5140	230/50Hz	9-100	L	98-0%	92-0%	95-0%	98-0%		98-0%	95-0%	95-0%	58-0%	82-0%	58-0%	82-0%	97-0%	99-0%	97-0%	99-0%	79-0%	87-0%	
Merten	MEG 5135	230/50Hz	60-1000	L	99-0%	98-0%	95-0%	97-0%	100-0%	100-0%	99-0%		96-0%	91-0%		88-0%	100-0%	98-0%	100-0%	98-0%	86-0%	92-0%	
MK	K4501	230/50Hz	180	L	99-0%	99-0%	85-0%	95-0%	74-0%	97-0%		100-0%		99-0%		100-0%	99-0%	99-0%	99-0%	99-0%	78-0%	91-0%	
NEXUS	881P-01	230/50Hz	400	L	99-0%	97-0%	91-0%		74-0%	80-0%	99-0%	99-0%	69-0%	98-0%		100-0%	99-0%	98-0%	99-0%	98-0%	90-0%	93-0%	
NIKO	310-01900	230/50Hz	5-200	U	100-0%	99-0%	80-0%	92-0%	85-0%	89-0%	99-0%	99-0%	85-0%	85-0%	68-0%	74-0%	99-0%	99-0%	99-0%	99-0%	98-0%	98-0%	
NIKO	330-00700	230/50Hz	5-200	U	100-9%	100-5%	100-0%	95-0%	71-0%	100-0%	99-0%	99-0%	65-0%	85-0%	52-0%		100-0%	100-5%	100-0%	100-5%	100-0%	79-0%	
Odace	S520512	230/50Hz			100-0%	100-0%	100-0%	94-0%	80-0%	98-0%		99-0%	98-0%	96-0%	98-0%	99-0%	100-0%		100-0%		99-0%	100-0%	
Odace	S520511	230/50Hz			99-0%	53-0%		98-0%			98-0%	99-0%	92-0%	91-0%	89-0%	83-0%	99-0%	99-0%	99-0%	99-0%	98-0%	100-0%	
Odace	S520515	230/50Hz			97-0%	99-0%	78-0%	95-0%	80-0%	97-0%	93-0%		89-0%	98-0%	88-0%	100-0%	95-0%		95-0%		75-0%	79-0%	
Odace	S520518	230/50Hz			98-0%	92-0%	95-0%	98-0%		98-0%	95-0%	95-0%	58-0%	82-0%	58-0%	82-0%	97-0%	99-0%	97-0%	99-0%	79-0%	87-0%	
Osram	HTI DALI 315 DIM	230/50Hz	20-315	DALI-T	99-0%	98-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%		100-0%		100-0%	100-0%	100-0%	99-0%	99-0%	99-0%	100-0%	
PEHA	435 HAN	230/50Hz	60-600	L	84-0%	91-0%	91-0%	92-0%		95-0%	95-0%	97-0%			81-0%		81-0%	96-0%	97-0%	96-0%	97-0%	77-0%	85-0%
Schneider	400GLI	230/50Hz	40-400	T	88-0%	90-0%	92-0%	98-0%								100-0%	92-0%	94-0%	92-0%	94-0%	74-0%	79-0%	
Schneider	SBD315RC	230/50Hz					95-0%			98-0%	100-0%	100-0%		97-0%		99-0%	0-0%	0-0%	0-0%	0-0%	86-0%	100-0%	
Schneider	SBD200LED	230/50Hz	400		100-0%	100-0%	100-0%	94-0%	80-0%	98-0%		99-0%	98-0%	96-0%	98-0%	99-0%	100-0%		100-0%		99-0%	100-0%	
Schneider	SBD600RCRL	230/50Hz			99-0%	86-0%	92-0%	94-0%	94-0%	98-0%	97-0%	92-0%		98-0%		100-0%	98-0%	97-0%	98-0%	97-0%	82-0%	90-0%	
Schneider	SBD630RC	230/50Hz			100-0%	100-0%	85-0%	92-0%			99-0%	95-0%	92-0%	97-0%	88-0%	99-0%	76-0%	99-0%	76-0%	75-0%	90-0%		
Schneider	SBD600RL	230/50Hz			99-0%	53-0%		98-0%			98-0%	99-0%	92-0%	91-0%	89-0%	83-0%	99-0%	99-0%	99-0%	99-0%	98-0%	100-0%	
Schneider	SBD420RCRL	230/50Hz			97-0%	99-0%	78-0%	95-0%	80-0%	97-0%	93-0%		89-0%	98-0%	88-0%	100-0%	95-0%		95-0%		75-0%	79-0%	
Schneider	5170	230/50Hz			100-0%		98-0%	92-0%	83-0%	89-0%		63-0%	65-0%	85-0%	88-0%	88-0%				0-0%	77-0%	94-0%	
Schneider	SBD400RL	230/50Hz			100-0%	86-0%	94-0%	100-0%	93-0%	100-0%	97-0%	92-0%	63-0%	83-0%	64-0%	81-0%	98-0%	96-0%	98-0%	96-0%	82-0%	91-0%	
Schneider	SBD5PL	230/50Hz			98-0%	92-0%	95-0%	98-0%		98-0%	95-0%	95-0%	58-0%	82-0%	58-0%	82-0%	97-0%	99-0%	97-0%	99-0%	79-0%	87-0%	
Schneider	ATTD1000RL	230/50Hz			99-0%	98-0%	95-0%	97-0%	100-0%	100-0%	99-0%		96-0%	91-0%		88-0%	100-0%	98-0%	100-0%	98-0%	86-0%	92-0%	
Shuttle	SDIM-T-LED-500W	230/50Hz	2-500	T & LED-T	99-0%	98-0%	98-0%	94-0%		98-0%	99-0%	99-0%	86-0%	92-0%		100-0%	99-0%	98-0%	99-0%	98-0%	86-0%	94-0%	

## DIMMER COMPATIBILITY CLASSIC P

Legend					PARATHOM PRO CL P 40 FIL	PARATHOM DIM CL P 25 GL FR E27	PARATHOM DIM CL P 25 GL FR E14	PARATHOM DIM CL P 40 Frosted	PARATHOM DIM CL P 40 FIL/GL FR E27/B22d	PARATHOM DIM CL P 40 FIL/GL FR E14	SUPERIOR CL P 40 FIL/GL FR E14	SUPERIOR CL P 40 FIL/GL FR E27	PARATHOM DIM CL P 60 GL FR E14										
	Good dimmability with indicated number of lamps (dimming range greater than 75%)																						
	Limited dimmability with indicated number of lamps (dimming range smaller than 75%)																						
	Undesired dimmability																						
	Not tested																						
		4058075591738 / AC32286 4058075591752 / AC32287				4058075590816 / AC32299		4058075591134 / AC32330		4058075594289 / AC31130		4058075590694 / AC32292 4058075590779 / AC32297 4058075590793 / AC32298		4058075591196 / AC32335 4058075591233 / AC32337		4058075758445 / AC34013 4058075758520 / AC34014 4058075758483 / AC34015 4058075758568 / AC34016		4058075758469 / AC34009 4058075758544 / AC34010 4058075758506 / AC34011 4058075758582 / AC34012		4058075590731 / AC32295			
Dimmer					Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps			
Brand	Model	Voltage range	Power	Type																			
Siemens	STC8 284	230/50Hz	20-525	T	74-2%	66-0%									82-3%	70-0%	82-3%	70-0%	98-0%	100-0%			
Siemens	SWG1-528-1AB31	230/50Hz	20-500	KNX-U			100-100%	100-0%	100-0%	100-0%	99-0%	99-0%	85-0%	85-0%	85-0%	85-0%			86-0%	93-0%			
theben	DIMAX 544 plus P	230/50Hz	250	T			97-0%	97-0%	97-0%	97-0%	99-0%	99-0%	93-0%	95-0%	93-0%	93-0%			92-0%	97-0%			
theben	DIMAX 534 plus	230/50Hz	400	T	99-0%	99-0%	100-0%	100-0%	100-0%	100-0%			100-0%	100-0%	100-0%	100-0%	59-0%	99-0%	59-0%	99-0%	94-0%	96-0%	
VADSBO	LD 220	230/50Hz	1-200	U	98-0%	98-0%	97-0%	95-0%	100-0%	98-0%	99-0%	99-0%	83-0%	89-0%	96-0%	96-0%	98-0%	98-0%	98-0%	98-0%	86-0%	93-0%	
VARILIGHT	HQ3W	230/50Hz	400				94-0%	69-0%	89-0%	99-0%			65-0%	91-0%	52-0%	92-0%	98-3%	98-3%	98-3%	98-3%	76-0%	100-0%	
VARILIGHT	JQP401W	230/50Hz	400	T			86-0%	97-0%					97-0%	99-0%	99-0%	100-0%					98-0%	100-0%	
Vimar	20135	230/50Hz	3 - 100	U	100-0%	100-0%	98-0%	91-0%		95-0%	99-0%	99-0%	58-0%	74-0%		83-0%	100-0%	99-0%	100-0%	99-0%	81-0%	94-0%	
ZANO	WH401	230/50Hz	400	L			95-0%	92-0%	75-0%	80-0%	98-0%	98-0%		99-0%		100-0%					85-0%	91-0%	
ZANO	WH251	230/50Hz	250			95-0%	94-0%	89-0%	77-0%	94-0%		95-0%	85-0%	97-0%	74-0%	95-0%		88-0%		88-0%	70-0%	92-0%	
ZANO	Z GRID 700	230/50Hz	250	LED			92-0%	97-0%	100-0%	95-0%			98-0%	95-0%	100-0%	82-0%		98-0%	98-0%	98-0%	98-0%	98-0%	100-0%
ZANO	Z GRID 600	230/50Hz	250	T	99-0%	98-0%												98-0%	98-0%	98-0%	98-0%		
ZANO	Z GRID 500	230/50Hz	500		99-0%	97-0%	75-0%	97-0%	95-0%	97-0%	97-0%	98-0%		98-0%		99-0%	98-0%	99-0%	98-0%	99-0%	87-0%	89-0%	

**Please note:**

- The compatibility list is based upon testing conducted by the manufacturer in a lab simulated environment, and the results can vary in certain field applications due to a number of factors. LEDVANCE does not take over any responsibility, warranty or liability that this results can also achieved by using the devices under other conditions, or when using successor models of the tested devices, or different models of the same manufacturer, or when using other LED lamp types.
- The absence of a dimmer from this chart does not necessarily imply incompatibility.
- Please reference the dimmer manufacturer's instructions for installation.
- LED lamps contain several electronic components. Under unfavourable conditions these can lead to acoustic noise. In case of resonance even low noise can cause audible effect. Possible factors influencing this are the installation, the design of the lamp holder and the luminaire (acoustic resonance effect) as well as the dimmer or the transformer (harmonic or electronic resonance).
- Subject to change without notice.
- Errors and omission excepted.
- Always make sure to use the most recent release.

**Application Notes:**

- For best dimming results trailing edge dimmer type is recommended.
- Trailing edge type dimmer requires the neutral wire for installation.

**LEDVANCE GmbH**

Head Office:

Parkring 33  
85748 Garching, Germany  
Phone +49 89 780673-100  
Fax +49 89 780673-XXX  
[www.ledvance.com](http://www.ledvance.com)

**Bitte beachten:**

- Die Kompatibilitätsliste basiert auf Tests, die der Hersteller in einer im Labor simulierten Umgebung durchgeführt hat. Die Ergebnisse können aufgrund verschiedener Faktoren in manchen Praxisanwendungen abweichen. LEDVANCE übernimmt keinerlei Verantwortung, Garantie oder Haftung dafür, dass diese Ergebnisse tatsächlich mit den Geräten unter anderen Bedingungen, mit Nachfolgemodellen der getesteten Geräte, mit anderen Modellen desselben Herstellers oder bei Verwendung anderer LED-Lampentypen erreicht werden.
- Das Fehlen eines Dimmers in der Abbildung bedeutet nicht, dass ein Dimmer nicht kompatibel ist.
- Lesen Sie stets die Installationsanweisungen des Dimmerherstellers.
- LED-Lampen bestehen aus mehreren elektronischen Komponenten. Unter ungünstigen Bedingungen können diese Störgeräusche erzeugen. Im Resonanzfall können selbst geringe Geräusche einen hörbaren Effekt hervorrufen. Einflussfaktoren können die Installation, die Gestaltung des Lampenträgers, die Leuchte (akustischer Resonanzeffekt), der Dimmer oder der Trafo (Oberschwingungen oder elektronische Resonanz) sein.
- Änderungen vorbehalten.
- Irrtümer und Auslassungen vorbehalten.
- Vergewissern Sie sich, dass Sie stets die aktuellste Version benutzen.

**Anwendungshinweis:**

- Um bestmögliche Dimmerergebnisse zu erzielen, wird die Verwendung von Phasenabschnitt-Dimmern empfohlen.
- Phasenabschnitt-Dimmer erfordern bei der Installation einen Neutralleiter.