


DIMMER COMPATIBILITY 1906 EDISON

BASIC INFORMATION:

1. WHAT IS THE PRODUCT CODE AND WHERE DO I FIND IT?

The product code describes the lamp type. It contains 7 letters and digits and is starting with "A". Below an example for the product code of the stamp of the lamp:

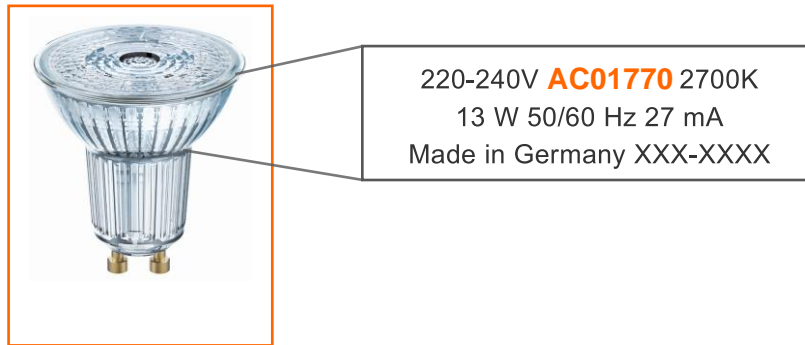

2. HOW CAN I READ THE FOLLOWING CHARTS?

Legend:
Information about the dimmability of the lamps. Green means very good dimmability, yellow means limited dimmability, red means undesired dimmability etc.

List of dimmers tested in laboratory conditions

Legend					SUPERSTAR PAR16 35 36°				SUPERSTAR PAR16 50 36°				SUPERSTAR PAR16 80 36°				SUPERSTAR PAR16 80 120°			
Very good dimmability with indicated number of lamps (dimming range greater than 75%)																				
Limited dimmability with indicated number of lamps (dimming range smaller than 75%)																				
Undesired dimmability																				
Not relevant																				
Not tested																				
EAN/Basic Code					4052839330153/AC01184				4052839330171/AC01187				4052839330218/AB41905				4058075036889/AC03043			
EAN/Basic Code					4052839330157/AC01182				4052839330195/AC01184				4052839330232/AB41906				4058075036825/AC03051			
Dimmer					Number of Lamps		Dimming range		Number of Lamps		Dimming range		Number of Lamps		Dimming range		Number of Lamps		Dimming range	
ABB	STD 50-3	230/50Hz	60-500	L	1-20	98% - 15%	1-13	98% - 20%	1-8	97% - 23%	1-8	97% - 23%	1-20	98% - 15%	2-20	97% - 12%	2-20	98% - 16%	2-20	98% - 16%
Altenburger Electronic	50 30	230/50Hz	15-350	T	1-10	98% - 15%	2-10	97% - 12%	1-4	96% - 1%	1-4	96% - 1%	1-10	98% - 15%	2-10	97% - 12%	1-4	96% - 1%	1-4	96% - 1%
ALPORA	DSP 400	230/50Hz	400	L	1-20	98% - 27%	1-20	98% - 26%	1-20	97% - 27%	1-20	97% - 27%	1-20	98% - 1%	2-9	98% - 1%	1-6	97% - 9%	1-6	97% - 9%
Berker	2861	230/50Hz	50-420	U	1-15	98% - 1%	1-10	97% - 5%	1-6	94% - 7%	1-6	94% - 7%	1-15	98% - 1%	2-9	98% - 1%	1-6	97% - 9%	1-6	97% - 9%
Blicino	L/NNT441N	230/50Hz			3-19	99% - 19%	2-12	97% - 19%	1-8	95% - 22%	1-8	95% - 22%	2-20	99% - 15%	2-20	98% - 17%	2-20	98% - 21%	2-20	98% - 21%
Blicino	L/NNT4408	230/50Hz			1-10	96% - 22%	1-10	97% - 26%	1-10	96% - 22%	1-10	96% - 22%	1-10	96% - 22%	2-14	98% - 16%	1-9	97% - 15%	1-9	97% - 15%
Blicino	NT4402N	230/50Hz	500	R	1-13	98% - 34%	1-10	97% - 35%	1-5	97% - 15%	1-5	97% - 15%	1-20	98% - 15%	1-13	98% - 20%	1-8	97% - 23%	1-8	97% - 23%
Busch-Jaeger	6513 U-102	230/50Hz	40-420	T	2-13	98% - 1%	1-10	98% - 5%	1-6	97% - 9%	1-6	97% - 9%	1-20	98% - 1%	1-10	98% - 5%	1-6	97% - 9%	1-6	97% - 9%
Busch-Jaeger	6523 U-102	230/50Hz	420	T	1-11	98% - 1%	1-10	98% - 1%	1-5	99% - 7%	1-5	99% - 7%	1-10	98% - 1%	1-10	98% - 1%	1-5	99% - 7%	1-5	99% - 7%
Busch-Jaeger	2250 U	230/50Hz	60-600	L	1-10	98% - 1%	1-10	98% - 1%	1-4	97% - 1%	1-4	97% - 1%	1-10	98% - 1%	1-10	98% - 1%	1-4	97% - 1%	1-4	97% - 1%
Busch-Jaeger	6526 U	230/50Hz			2-20	98% - 6%	1-20	98% - 7%	1-20	97% - 10%	1-20	97% - 10%	1-10	98% - 1%	1-13	97% - 1%	1-8	96% - 1%	1-8	96% - 1%
Busch-Jaeger	2247 U-500	230/50Hz			1-20	98% - 1%	1-13	97% - 4%	1-10	97% - 19%	1-10	97% - 19%	1-20	98% - 1%	1-13	97% - 4%	1-10	97% - 19%	1-10	97% - 19%
Busch-Jaeger	6526 U	230/50Hz			1-14	98% - 1%	1-13	97% - 4%	1-10	97% - 19%	1-10	97% - 19%	1-14	98% - 1%	1-13	97% - 4%	1-10	97% - 19%	1-10	97% - 19%
CENTURY CONTROL	MULTI DIMMER	230/50Hz	60-600	L																
DINUY	RE EL1LE1	230/50Hz	400	LED																
ELKO	400GLI	230/50Hz																		
ELKO	315GLE	230/50Hz	20-315	T																
ELKO	600GLI	230/50Hz	40-600	U																
ELKO	420GLEI	230/50Hz	40-420	U																

Information about the OSRAM lamp type

Assessment of the results into categories. Includes the number of lamps and the related dimming range

DIMMER KOMPATIBILITÄT 1906 EDISON

BASISINFORMATIONEN:

1. WAS IST DER PRODUKTCODE UND WO FINDE ICH IHN?

Der Produktcode beschreibt den Lampentyp. Er besteht aus sieben Buchstaben und Ziffern und beginnt mit einem "A". Nachfolgend ein Beispiel eines Produktcodes auf dem Aufdruck der Lampe.



220-240V **AC01770** 2700K
 13 W 50/60 Hz 27 mA
 Made in Germany XXX-XXXX

2. WIE LESE ICH DIE FOLGENDEN TABELLEN?

Legende: Angaben zur Dimmbarkeit der Lampen. Grün bedeutet eine sehr gute Dimmbarkeit mit der angegebenen Lampenanzahl, gelb bedeutet eine eingeschränkte Dimmbarkeit, rot bedeutet, dass unerwünschtes dimmverhalten auftreten kann etc.








Liste der getesteten Dimmer










Legend					SUPERSTAR							
Very good dimmability with indicated number of lamps (dimming range greater than 75%)					PARI16 35 36*	PARI16 50 36*	PARI16 60 36*	PARI16 60 120*				
Limited dimmability with indicated number of lamps (dimming range smaller than 75%)												
Undesired dimmability					EAN/ Basic Code	EAN/ Basic Code	EAN/ Basic Code	EAN/ Basic Code				
Not relevant					405283330133/AC01184	405283330171/AC01187	405283330210/AB41305	405807503668/AC03049				
Not tested					405283330157/AC01192	405283330199/AC01194	405283330232/AB41306	405807503632/AC03051				
Dimmer					Number of Lamps	Dimming range	Number of Lamps	Dimming range	Number of Lamps	Dimming range	Number of Lamps	Dimming range
ABB	STD 50-3	230V50Hz	60-500	L	1-20	98%-15%	1-13	98%-20%	1-8	97%-23%	1-8	97%-23%
Altenburger Electronic	50 30	230V50Hz	15-350	T	2-20	98%-15%	2-20	97%-12%	2-20	98%-16%	2-20	98%-16%
AURORA	DSP 400	230V50Hz	400	L	1-10	98%-15%	2-10	97%-14%	1-4	96%-1%	1-4	96%-1%
Berker	2861	230V50Hz	50-420	U	1-20	98%-27%	1-20	98%-25%	1-20	97%-27%	1-20	97%-27%
Bicimo	LJNNT441N	230V50Hz			1-15	98%-1%	1-10	97%-5%	1-6	94%-7%	1-6	94%-7%
Bicimo	LJNNT4408	230V50Hz			2-20	98%-1%	2-9	98%-1%	1-6	97%-3%	1-6	97%-3%
Bicimo	NT4402N	230V50Hz	500	R	3-18	99%-19%	2-12	97%-19%	1-8	95%-22%	1-8	95%-22%
Busch-Jaeger	6513 U-102	230V50Hz	40-420	T	2-20	98%-15%	2-20	98%-17%	2-20	98%-21%	2-20	98%-21%
Busch-Jaeger	6523 U-102	230V50Hz	420	T	1-10	96%-22%	1-10	97%-26%				
Busch-Jaeger	2250 U	230V50Hz	60-600	L	1-10		2-14	98%-16%	1-9	97%-15%	1-9	97%-15%
Busch-Jaeger	6526 U	230V50Hz			1-13	98%-34%	1-10	97%-35%	1-5		1-5	
Busch-Jaeger	2247 U-500	230V50Hz			1-20	98%-15%	1-13	98%-20%	1-8	97%-23%	1-8	97%-23%
CENTURY CONTROL	MULTI DIMMER	230V50Hz	60-600	L	2-13	98%-1%	1-10	98%-5%	1-6	97%-9%	1-6	97%-9%
DINJY	RE EL1LE1	230V50Hz	400	LED	1-11	98%-1%	1-10	98%-1%	1-5	99%-7%	1-5	99%-7%
ELKO	400GLI	230V50Hz			1-10		1-10		1-4	97%-1%	1-4	97%-1%
ELKO	316GLE	230V50Hz	20-315	T	2-20	98%-6%	1-20	98%-7%	1-20	97%-10%	1-20	97%-10%
ELKO	600GLI	230V50Hz	40-600	U	1-20	98%-1%	1-13	97%-1%	1-8	96%-1%	1-8	96%-1%
ELKO	420GLEI	230V50Hz	40-420	U	1-14	98%-1%	1-13	97%-4%	1-10	97%-19%	1-10	97%-19%

Angaben zum OSRAM Lampentyp

Bewertung der Testergebnisse in Ampel Kategorien. Beinhaltet sowohl die Lampenanzahl als auch den dimmbaren Bereich

DIMMER COMPATIBILITY 1906 EDISON

Legend					Vintage 1906 CL Edison 55	Vintage 1906 CL Edison Spiral DIM 28	CLAS EDISON DIM S	Vintage 1906 EDISON DIM 40	Vintage 1906 EDISON DIM 60	Vintage 1906 EDISON DIM 30	Vintage 1906 EDISON DIM 48	Vintage 1906 EDISON DIM 42	Vintage 1906 EDISON DIM 37											
 Good dimmability with indicated number of lamps (dimming range greater than 75%)																								
 Limited dimmability with indicated number of lamps (dimming range smaller than 75%)																								
 Undesired dimmability																								
 Not tested																								
					4099854081514 / AC45231	4099854090103 / AC45233	4099854062322 / AC45192 4099854062483 / AC45193	4099854091063 / AC41922	4099854091087 / AC41923	4099854090981 / AC41908	4099854091049 / AC41921	4099854091001 / AC41909	4099854091025 / AC41920											
Dimmer					Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps				
Brand	Model	Voltage range	Power	Type																				
2001	63533	230/50Hz	29,08	T																				
2007	63533	230/50Hz	24,08	T																				
ABB	STD 50-3	230/50Hz	60-500	L	89-0%	99-1%	98-6%	96-1%	97-0%	98-2%	92-26%	99-40%	100-28%	94-23%	91-2%	92-4%	95-5%	95-5%	100-10%	99-17%	100-4%	100-6%		
Altenburger	50_3	230/50Hz			89-0%	99-0%	99-0%	99-0%	99-0%	99-0%	92-30%	89-25%	100-38%	100-27%	94-0%	94-0%	97-0%	96-22%	99-17%	100-0%	100-0%			
AURORA	DSP 400	230/50Hz	400	L	89-0%	99-0%	97-0%	96-0%	96-0%	99-0%	94-0%	89-0%	98-0%	98-0%	92-0%	92-0%	96-0%	100-0%	100-0%	100-0%	100-0%			
Berker	2861	230/50Hz	50-420	U			89-0%	94-0%			96-36%	98-42%	100-32%	98-38%	93-1%	92-0%	92-2%	92-0%	94-29%	100-19%	100-0%	100-0%		
Bticino	L/N/NT4411N	230/50Hz			79-0%	83-0%	99-0%	92-0%	80-0%	97-0%	100-14%	100-5%	100-9%	100-9%	92-0%	93-0%	98-0%	98-0%	98-10%	100-11%	100-0%	100-0%		
Bticino	L/N/NT4408	230/50Hz																	98-0%	98-0%				
bticino	NT4402N	230/50Hz	500	R				97-0%			100-23%		100-41%	94-0%		95-0%	45-8%	98-0%	97-28%	93-8%		100-0%		
Busch-Jaeger	6513 U-102	230/50Hz	420	T	94-0%	94-0%	99-0%	98-0%	96-0%	97-0%	95-40%	94-30%	100-29%	100-20%	95-1%	92-0%	99-1%	99-0%	96-31%	100-20%	100-2%	100-0%		
Busch-Jaeger	6523 U-102	230/50Hz	40-420	T	70-0%	73-0%	82-0%	91-0%	70-0%	92-0%	94-0%	100-0%	100-0%	100-0%	95-0%	96-0%	99-0%	99-0%		100-0%	100-0%	100-0%		
Busch-Jaeger	2250 U	230/50Hz	60-600	L				98-0%			98-17%	88-0%	98-0%	96-0%		94-0%		94-0%	95-0%			100-0%		
Busch-Jaeger	6526 U	230/50Hz									97-14%	96-14%	100-8%	100-8%	56-0%	65-0%						100-0%		
CENTURY CONTROL	MULTI DIMMER	230/50Hz	60-600	U	88-0%	99-0%	98-0%	97-0%	96-0%	99-0%	90-9%	88-15%	100-15%	100-11%	95-0%	93-0%	97-0%	98-0%	96-7%	98-8%	100-0%	100-0%		
DimMax	420 SL	230/50Hz	200	L/T	90-0%	94-0%	99-0%	97-0%	98-0%	97-0%	98-0%	100-9%	100-6%	100-9%			95-0%	97-0%	100-9%	100-8%	100-0%	100-0%		
DINUY	RE EL1 LE1	230/50Hz	400	LED	94-1%	98-1%	98-5%	96-2%	96-3%	95-3%	100-8%	100-9%	100-5%	100-9%	92-0%	92-0%	95-0%	96-0%	98-8%	98-7%	100-0%	100-0%		
ELKO	400GLI	230/50Hz					80-0%	86-0%			94-43%			100-31%	94-4%		98-1%	98-33%			100-0%	100-34%		
ELKO	315GLE	230/50Hz	20-315	T			96-0%	92-0%			89-39%	98-40%	99-33%	100-36%		96-0%	98-0%	99-0%	98-8%	96-8%	100-1%	100-0%		
ELKO	600GLE/I	230/50Hz			84-0%	74-0%	99-0%	88-0%	90-0%	91-0%	100-0%	96-0%	100-0%	100-0%	96-0%	96-0%	98-0%	97-0%	97-0%	95-0%	100-0%	100-0%		
ELKO	600GLI	230/50Hz	40-600	U	79-0%	79-0%	99-0%	51-0%	98-0%	95-0%	100-11%	99-18%	100-6%	100-13%	94-0%	95-0%	91-0%	91-0%	100-18%	100-0%	100-0%	100-0%		
ELKO	420GLE/I	230/50Hz	40-420	U	89-0%		96-0%	96-0%	85-0%		100-21%	100-19%	100-17%	100-18%	95-0%	96-0%	98-0%	98-0%	99-9%	99-10%	100-0%	100-0%		
ELKO	1000LRI	230/50Hz			88-0%	99-0%	99-0%	96-0%	97-0%	99-0%								98-0%	99-0%					
ELKO	630GLE	230/50Hz	20-630	U			98-0%	98-0%	98-0%	74-0%	89-28%	91-29%	100-27%	100-28%	95-0%	96-0%	59-0%	95-0%		100-20%	100-0%	100-0%		
Eltako	EUD61NPN-UC	230/50Hz	5-400	R / L / C	94-0%	98-0%	97-0%	98-0%	96-0%	99-0%	100-0%	100-0%	100-11%	100-5%	93-0%	94-0%	98-0%	97-0%	99-0%	99-0%	100-0%	100-0%		
Feller	40200.LEDxxx	230/50Hz					99-0%	97-0%	98-0%		95-23%	98-17%	100-25%	100-27%	96-0%	96-0%	91-0%	95-0%	94-23%	93-22%	100-0%	100-0%		
Feller	40600.RLC	230/50Hz	20-600	U	84-0%	74-0%	99-0%	88-0%	90-0%	91-0%	100-0%	96-0%	100-0%	100-0%	96-0%	96-0%	98-0%	97-0%	97-0%	95-0%	100-0%	100-0%		
Feller	40600.RC	230/50Hz					98-0%	98-0%	98-0%	74-0%	89-28%	91-29%	100-27%	100-28%	95-0%	96-0%	59-0%	95-0%		100-20%	100-0%	100-0%		
Feller	40600.RL	230/50Hz			79-0%	79-0%	99-0%	51-0%	98-0%	95-0%	100-11%	99-18%	100-6%	100-13%	94-0%	95-0%	91-0%	91-0%		100-18%	100-0%	100-0%		
Feller	40420.RLC	230/50Hz			89-0%		96-0%	96-0%	85-0%		100-21%	100-19%	100-17%	100-18%	95-0%	96-0%	98-0%	98-0%	99-9%	99-10%	100-0%	100-0%		
Feller	31000	230/50Hz			88-0%	99-0%	99-0%	96-0%	97-0%	99-0%									98-0%	99-0%				
GIRA	226200	230/50Hz			80-0%	83-0%	90-0%	94-0%	88-0%	97-0%	93-4%	98-0%	99-1%	96-0%	72-6%	92-0%	71-0%	98-0%	98-2%	99-3%	72-0%	100-0%		
Gira	030700	230/50Hz	20-525	T	93-0%	94-0%	99-0%	98-0%	98-0%	99-0%	100-26%	100-19%	100-19%	100-18%	94-0%	97-0%	98-0%	99-0%	100-25%	100-22%	100-0%	100-0%		
Gira	117600	230/50Hz	50-420	U			94-0%	92-0%			100-36%	97-39%	100-32%	100-37%	98-1%	98-0%	95-0%	94-0%	94-29%	93-30%	100-2%	100-1%		
Gira	238500	230/50Hz					96-0%	88-0%			87-7%	87-7%	99-13%	98-11%	94-0%	96-0%	95-0%	95-0%	97-11%	95-10%		100-0%		
Gira	217400	230/50Hz	4X20-250	KNX-U	93-0%	99-19%		97-22%	96-29%	98-23%	100-18%	100-22%	100-17%	100-19%	91-0%	92-0%	98-0%	98-0%	98-0%	99-16%	100-0%	100-0%		
Hager	WUD87	230/50Hz	400	LED-U	89-0%		99-0%	87-0%	85-0%	63-0%	100-21%	100-20%	100-19%	96-14%	96-0%	96-0%	98-0%	99-0%	100-20%	97-16%	100-0%	100-0%		
Hamilton	KP1X40	230/50Hz	400		92-0%		95-0%			98-98%														
Hugo Müller	paladin 872110 led	230/50Hz			94-1%	98-1%	98-5%	96-2%	96-3%	95-3%	100-8%	100-9%	100-5%	100-9%	92-0%	92-0%	95-0%	96-0%	98-8%	98-7%	100-0%	100-0%		
Jung	225 NVDE	230/50Hz	20-500	L	80-0%	83-0%	90-0%	94-0%	88-0%	97-0%	93-4%	98-0%	99-1%	96-0%	72-6%	92-0%	71-0%	98-0%	98-2%	99-3%	72-0%	100-0%		
Jung	225 TDE	230/50Hz			93-0%	94-0%	99-0%	98-0%	98-0%	99-0%	100-26%	100-19%	100-19%	100-18%	94-0%	97-0%	98-0%	99-0%	100-25%	100-22%	100-0%	100-0%		

Legend					Vintage 1906 CL Edison 55		Vintage 1906 CL Edison Spiral DIM 28		CLAS EDISON DIM S		Vintage 1906 EDISON DIM 40		Vintage 1906 EDISON DIM 60		Vintage 1906 EDISON DIM 30		Vintage 1906 EDISON DIM 48		Vintage 1906 EDISON DIM 42		Vintage 1906 EDISON DIM 37			
Good dimmability with indicated number of lamps (dimming range greater than 75%)																								
Limited dimmability with indicated number of lamps (dimming range smaller than 75%)					EAN / Basic Code		EAN / Basic Code		EAN / Basic Code		EAN / Basic Code		EAN / Basic Code		EAN / Basic Code		EAN / Basic Code		EAN / Basic Code		EAN / Basic Code			
Undesired dimmability					4099854081514 / AC45231		4099854090103 / AC45233		4099854062322 / AC45192 4099854062483 / AC45193		4099854091063 / AC41922		4099854091087 / AC41923		4099854090981 / AC41908		4099854091049 / AC41921		4099854091001 / AC41909		4099854091025 / AC41920			
Not tested																								
Dimmer					Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps		
Brand	Model	Voltage range	Power	Type																				
Schneider	SBD630RC	230/50Hz										89-28%	91-29%	100-27%	100-28%	95-0%	96-0%	59-0%	95-0%		100-20%	100-0%	100-0%	
Schneider	SBD600RL	230/50Hz			79-0%	79-0%	99-0%	51-0%	98-0%	95-0%		100-11%	99-18%	100-6%	100-13%	94-0%	95-0%	91-0%	91-0%		100-18%	100-0%	100-0%	
Schneider	SBD420RCRL	230/50Hz			89-0%		96-0%	96-0%	85-0%			100-21%	100-19%	100-17%	100-18%	95-0%	96-0%	98-0%	98-0%		99-9%	99-10%	100-0%	100-0%
Schneider	5170	230/50Hz			89-0%		99-0%	87-0%				81-35%		97-34%	100-37%	94-0%	97-0%	98-0%	99-0%		88-31%	93-31%	100-0%	100-0%
Schneider	SBD400RL	230/50Hz			69-0%	74-0%	99-0%	82-0%	91-0%	90-0%		100-0%	95-0%	100-15%	100-19%	91-0%	95-0%	92-0%	97-0%		99-0%	98-0%	96-0%	100-0%
Schneider	SBD5PL	230/50Hz			69-0%	78-0%	97-0%	90-0%	91-0%	96-0%		85-1%	96-0%	83-1%	100-3%	85-0%	58-0%	88-0%	88-0%		96-0%	100-0%	86-0%	90-0%
Schneider	ATTD1000RL	230/50Hz			88-0%	99-0%	99-0%	96-0%	97-0%	99-0%								98-0%	99-0%					
Shuttle	SDIM-T-LED-500W	230/50Hz	2-500	T & LED-T	89-0%	99-0%	98-0%	96-0%	97-0%	64-0%		95-11%	95-14%	99-17%	100-19%	96-0%	94-0%	96-0%	97-0%		97-10%	97-10%	100-0%	100-0%
Siemens	5TC8 284	230/50Hz	20-525	T	64-0%	57-0%	74-2%	65-0%	74-2%	73-0%		95-15%	90-9%	100-10%	94-4%		72-0%		99-0%		98-15%	100-10%		100-0%
Siemens	5WG1-527-1AB31	230/50Hz	20-500	KNX-U			95-0%	96-16%				100-0%	100-0%	100-0%	100-0%	93-0%	94-0%	97-0%	96-0%		98-0%	98-0%	100-0%	100-0%
theben	DIMAX 544 plus P	230/50Hz	250	T			98-0%	94-0%				100-17%	100-20%	100-0%	100-14%	97-0%	95-0%	96-0%	99-0%		100-20%	99-18%	100-0%	100-0%
theben	DIMAX 534 plus	230/50Hz	400	T	89-0%	99-0%	99-0%	97-0%	97-0%	99-0%		100-0%	100-0%	96-0%	100-0%	96-0%	97-0%	98-0%	98-0%		99-11%	99-5%	100-0%	100-0%
VADSBO	LD 220	230/50Hz	1-200	U	90-0%	99-0%	98-0%	97-0%	96-0%			100-2%	89-3%	100-4%	86-4%	93-0%	93-0%	95-0%	95-0%		97-1%	97-4%	99-0%	99-0%
VARILIGHT	HQ3W	230/50Hz	400		93-1%	99-1%		96-2%	96-2%	98-3%		99-30%	97-33%	96-32%	100-41%	92-3%	92-3%	95-3%	95-0%		98-38%	98-42%	100-4%	100-4%
VARILIGHT	JQP401W	230/50Hz	400	T			96-0%	90-4%																
Vimar	20135	230/50Hz	3 - 100	U	93-0%	99-0%			97-0%	98-0%		100-9%	100-10%	84-1%	100-11%	93-0%	93-0%	99-0%	97-0%		97-8%	99-8%	100-0%	100-0%
ZANO	WH401	230/50Hz	400	L			98-0%	96-21%									70-4%	95-0%	95-0%				100-0%	
ZANO	WH251	230/50Hz	250			99-0%		95-0%																
ZANO	Z GRID 700	230/50Hz	250	LED					92-0%	98-0%				97-0%	97-0%	94-0%	94-0%	97-0%	97-0%				100-0%	99-0%
ZANO	Z GRID 600	230/50Hz	250	T	87-0%	98-0%	98-0%	96-0%				86-0%	85-0%	97-0%	97-0%	94-0%	94-0%	97-0%	97-0%				100-0%	99-0%
ZANO	Z GRID 500	230/50Hz	500		81-0%	94-0%	99-0%	96-0%	91-0%	98-0%		92-0%	97-0%		100-0%	89-0%	93-0%	89-0%	98-0%				92-0%	100-0%

Please Note:

- The compatibility list is based upon testing conducted by the manufacturer in a lab simulated environment, and the results can vary in certain field applications due to a number of factors. OSRAM does not take over any responsibility, warranty or liability that this results can also achieved by using the devices under other conditions, or when using successor models of the tested devices, or different models of the same manufacturer, or when using other LED lamp types
- The absence of a dimmer from this chart does not necessarily imply incompatibility.
- Please reference the dimmer manufacturer's instructions for installation.
- LED lamps contain several electronic components. Under unfavourable conditions these can lead to acoustic noise. In case of resonance even low noise can cause audible effect. Possible factors influencing this are the installation, the design of the lamp holder and the luminaire (acoustic resonance effect) as well as the dimmer or the transformer (harmonics or electronic resonance).
- Subject to change without notice
- Errors and omission excepted
- Always make sure to use the most recent release

Application Notes:

- For best dimming results trailing edge dimmer type is recommended.
- Trailing edge type dimmer requires the neutral wire for installation.

Bitte beachten:

- Die Kompatibilitätsliste basiert auf Tests, die der Hersteller in einer im Labor simulierten Umgebung durchgeführt hat. Die Ergebnisse können aufgrund verschiedener Faktoren in manchen Praxisanwendungen abweichen. OSRAM übernimmt keinerlei Verantwortung, Garantie oder Haftung dafür, dass diese Ergebnisse tatsächlich mit den Geräten unter anderen Bedingungen, mit Nachfolgemodellen der getesteten Geräte, mit anderen Modellen desselben Herstellers oder bei Verwendung anderer LED-Lampentypen erreicht werden.
- Das Fehlen eines Dimmers in der Abbildung bedeutet nicht, dass ein Dimmer nicht kompatibel ist.
- Lesen Sie stets die Installationsanweisungen des Dimmerherstellers.
- LED-Lampen bestehen aus mehreren elektronischen Komponenten. Unter ungünstigen Bedingungen können diese Störgeräusche erzeugen. Im Resonanzfall können selbst geringe Geräusche einen hörbaren Effekt hervorrufen. Einflussfaktoren können die Installation, die Gestaltung des Lampenträgers, die Leuchte (akustischer Resonanzeffekt), der Dimmer oder der Trafo (Oberschwingungen oder elektronische Resonanz) sein.
- Änderungen vorbehalten.
- Irrtümer und Auslassungen vorbehalten.
- Vergewissern Sie sich, dass Sie stets die aktuellste Version benutzen.

Anwendungshinweis:

- Um bestmögliche Dimmergebnisse zu erzielen, wird die Verwendung von Phasenabschnitt-Dimmern empfohlen.
- Phasenabschnitt-Dimmer erfordern bei der Installation einen Neutralleiter.

LEDVANCE GmbH

Head Office:

Parkring 33
85748 Garching, Germany
Phone +49 89 780673-100
Fax +49 89 780673-XXX
www.ledvance.com