


DIMMER COMPATIBILITY CLASSIC A (Heatsink)

BASIC INFORMATION:

1. WHAT IS THE PRODUCT CODE AND WHERE DO I FIND IT?

The product code describes the lamp type. It contains 7 letters and digits and is starting with "A". Below an example for the product code of the stamp of the lamp:

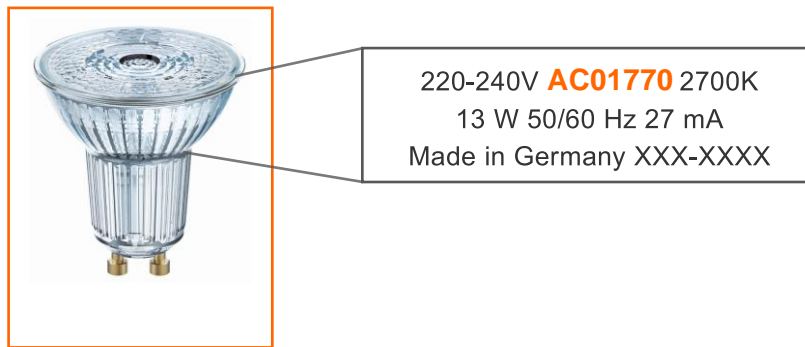

2. HOW CAN I READ THE FOLLOWING CHARTS?

Legend:
Information about the dimmability of the lamps. Green means good dimmability, yellow means limited dimmability, red means undesired dimmability etc.

List of dimmers tested in laboratory conditions

Legend						PARATHOM PRO PAR16				PARATHOM DIM PAR16			
						50 36°	80 36°	80 36°	80 60°	80 36°	80 36°	80 36°	80 60°
Good dimmability with indicated number of lamps (dimming range greater than 75%)													
Limited dimmability with indicated number of lamps (dimming range smaller than 75%)													
Undesired dimmability													
Not tested													
Dimmer						50 36°		80 36°		80 36°		80 60°	
Brand	Model	Voltage	Power	Type		1 Lamp	4 Lamps	1 Lamp	4 Lamps	1 Lamp	4 Lamps	1 Lamp	4 Lamps
ABB	STD 50-3	230/50Hz	60-500	L		58-0%	57-0%	86-0%	74-0%	85-0%	87-0%	85-0%	87-0%
Altenburger	50_3	230/50Hz				93-0%	92-0%	93-0%	92-0%	92-0%	92-0%	92-0%	92-0%
AURORA	DSP 400	230/50Hz	400	L		90-0%	89-0%	90-0%	89-0%	89-0%	89-0%	89-0%	89-0%
Berker	2861	230/50Hz	50-420	U		89-0%	88-0%	89-0%	88-0%	88-0%	88-0%	88-0%	88-0%
Bticino	L/N/NT4411N	230/50Hz				94-0%	93-0%	94-0%	93-0%	93-0%	92-0%	93-0%	92-0%
Busch-Jaeger	6513 U-102	230/50Hz	420	T		95-2%	93-0%						
Busch-Jaeger	6523 U-102	230/50Hz	40-420	T		95-3%	93-3%	95-3%	93-3%	94-3%	93-3%	94-3%	93-3%
Busch-Jaeger	2250 U	230/50Hz	60-600	L		50-1%	87-1%	93-1%	87-1%	90-1%	87-1%	90-1%	87-1%
Busch-Jaeger	6526 U	230/50Hz				94-40%	93-2%						
CENTURY CONTROL	MULTI DIMMER	230/50Hz	60-600	U		91-0%	90-0%	91-0%	90-0%	90-0%	90-0%	90-0%	90-0%
DimMax	420SL	230/50Hz	200	L/T		93-0%	91-0%	93-0%	91-0%	92-0%	91-0%	92-0%	91-0%
DINUY	RE EL1 LE1	230/50Hz	400	LED		92-0%	91-0%	92-0%	91-0%	91-0%	91-0%	91-0%	91-0%
ELKO	400GLI	230/50Hz				94-3%	91-0%	94-3%	91-0%	92-3%	90-0%	92-3%	90-0%
ELKO	315GLE	230/50Hz	20-315	T		92-3%	90-0%	92-3%	90-0%	91-3%	90-0%	91-3%	90-0%
ELKO	600GLE/I	230/50Hz				92-0%	91-0%	92-0%	91-0%	91-0%	91-0%	91-0%	91-0%
ELKO	600GLI	230/50Hz	40-600	U		92-2%	91-2%	92-2%	91-2%	91-2%	91-2%	91-2%	91-2%

Information about the lamp type


Assessment of the results into categories. Includes the number of lamps and the related dimming range

DIMMER KOMPATIBILITÄT CLASSIC A (Heatsink)

BASISINFORMATIONEN:

1. WAS IST DER PRODUKTCODE UND WO FINDE ICH IHN?

Der Produktcode beschreibt den Lampentyp. Er besteht aus sieben Buchstaben und Ziffern und beginnt mit einem "A". Nachfolgend ein Beispiel eines Produktcodes auf dem Aufdruck der Lampe.

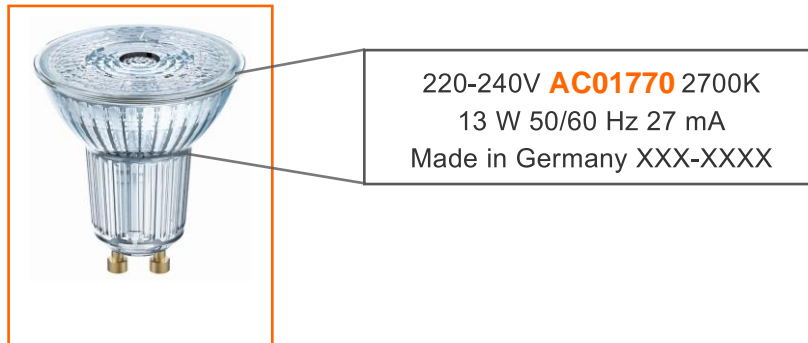

2. WIE LESE ICH DIE FOLGENDEN TABELLEN?

Legende: Angaben zur Dimmbarkeit der Lampen. Grün bedeutet eine gute Dimmbarkeit mit der angegebenen Lampenanzahl, gelb bedeutet eine eingeschränkte Dimmbarkeit, rot bedeutet, dass unerwünschtes Dimmverhalten auftreten kann etc.










Liste der getesteten Dimmer

Legend					PARATHOM PRO PAR16 50 36°		PARATHOM PRO PAR16 80 36°		PARATHOM DIM PAR16 80 36°		PARATHOM DIM PAR16 80 60°																																																																																																																																																																																																																							
Good dimmability with indicated number of lamps (dimming range greater than 75%) Limited dimmability with indicated number of lamps (dimming range smaller than 75%) Undesired dimmability Not tested																																																																																																																																																																																																																																		
Dimmer <table border="1"> <thead> <tr> <th>Brand</th> <th>Model</th> <th>Voltage range</th> <th>Power</th> <th>Type</th> </tr> </thead> <tbody> <tr><td>ABB</td><td>STD 50-3</td><td>230/50Hz</td><td>60-500</td><td>L</td></tr> <tr><td>Altenburger</td><td>50,3</td><td>230/50Hz</td><td></td><td></td></tr> <tr><td>AURORA</td><td>DSP 400</td><td>230/50Hz</td><td>400</td><td>L</td></tr> <tr><td>Berker</td><td>2861</td><td>230/50Hz</td><td>50-420</td><td>U</td></tr> <tr><td>Bticino</td><td>L/N/NT4411N</td><td>230/50Hz</td><td></td><td></td></tr> <tr><td>Busch-Jaeger</td><td>6513 U-102</td><td>230/50Hz</td><td>420</td><td>T</td></tr> <tr><td>Busch-Jaeger</td><td>6523 U-102</td><td>230/50Hz</td><td>40-420</td><td>T</td></tr> <tr><td>Busch-Jaeger</td><td>2250 U</td><td>230/50Hz</td><td>60-600</td><td>L</td></tr> <tr><td>Busch-Jaeger</td><td>6526 U</td><td>230/50Hz</td><td></td><td></td></tr> <tr><td>CENTURY CONTROL</td><td>MULTI DIMMER</td><td>230/50Hz</td><td>60-600</td><td>U</td></tr> <tr><td>DimMax</td><td>420SL</td><td>230/50Hz</td><td>200</td><td>L/T</td></tr> <tr><td>DINUY</td><td>RE ELI LE1</td><td>230/50Hz</td><td>400</td><td>LED</td></tr> <tr><td>ELKO</td><td>400GLI</td><td>230/50Hz</td><td></td><td></td></tr> <tr><td>ELKO</td><td>315GLE</td><td>230/50Hz</td><td>20-315</td><td>T</td></tr> <tr><td>ELKO</td><td>600GLE/I</td><td>230/50Hz</td><td></td><td></td></tr> <tr><td>ELKO</td><td>600GLI</td><td>230/50Hz</td><td>40-600</td><td>U</td></tr> </tbody> </table>					Brand	Model	Voltage range	Power	Type	ABB	STD 50-3	230/50Hz	60-500	L	Altenburger	50,3	230/50Hz			AURORA	DSP 400	230/50Hz	400	L	Berker	2861	230/50Hz	50-420	U	Bticino	L/N/NT4411N	230/50Hz			Busch-Jaeger	6513 U-102	230/50Hz	420	T	Busch-Jaeger	6523 U-102	230/50Hz	40-420	T	Busch-Jaeger	2250 U	230/50Hz	60-600	L	Busch-Jaeger	6526 U	230/50Hz			CENTURY CONTROL	MULTI DIMMER	230/50Hz	60-600	U	DimMax	420SL	230/50Hz	200	L/T	DINUY	RE ELI LE1	230/50Hz	400	LED	ELKO	400GLI	230/50Hz			ELKO	315GLE	230/50Hz	20-315	T	ELKO	600GLE/I	230/50Hz			ELKO	600GLI	230/50Hz	40-600	U	<table border="1"> <thead> <tr> <th>Dimming range 1 Lamp</th> <th>Dimming range 4 Lamps</th> <th>Dimming range 1 Lamp</th> <th>Dimming range 4 Lamps</th> <th>Dimming range 1 Lamp</th> <th>Dimming range 4 Lamps</th> <th>Dimming range 1 Lamp</th> <th>Dimming range 4 Lamps</th> </tr> </thead> <tbody> <tr><td>58-0%</td><td>57-0%</td><td>86-0%</td><td>74-0%</td><td>85-0%</td><td>87-0%</td><td>85-0%</td><td>87-0%</td></tr> <tr><td>93-0%</td><td>92-0%</td><td>93-0%</td><td>92-0%</td><td>92-0%</td><td>92-0%</td><td>92-0%</td><td>92-0%</td></tr> <tr><td>90-0%</td><td>89-0%</td><td>90-0%</td><td>89-0%</td><td>89-0%</td><td>89-0%</td><td>89-0%</td><td>89-0%</td></tr> <tr><td>89-0%</td><td>88-0%</td><td>89-0%</td><td>88-0%</td><td>88-0%</td><td>88-0%</td><td>88-0%</td><td>88-0%</td></tr> <tr><td>94-0%</td><td>93-0%</td><td>94-0%</td><td>93-0%</td><td>93-0%</td><td>92-0%</td><td>93-0%</td><td>92-0%</td></tr> <tr><td>95-2%</td><td>93-0%</td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>95-3%</td><td>93-3%</td><td>95-3%</td><td>93-3%</td><td>94-3%</td><td>93-3%</td><td>94-3%</td><td>93-3%</td></tr> <tr><td>50-1%</td><td>87-1%</td><td>93-1%</td><td>87-1%</td><td>90-1%</td><td>87-1%</td><td>90-1%</td><td>87-1%</td></tr> <tr><td>94-40%</td><td>93-2%</td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>91-0%</td><td>90-0%</td><td>91-0%</td><td>90-0%</td><td>90-0%</td><td>90-0%</td><td>90-0%</td><td>90-0%</td></tr> <tr><td>93-0%</td><td>91-0%</td><td>93-0%</td><td>91-0%</td><td>92-0%</td><td>91-0%</td><td>92-0%</td><td>91-0%</td></tr> <tr><td>92-0%</td><td>91-0%</td><td>92-0%</td><td>91-0%</td><td>91-0%</td><td>91-0%</td><td>91-0%</td><td>91-0%</td></tr> <tr><td>94-3%</td><td>91-0%</td><td>94-3%</td><td>91-0%</td><td>92-3%</td><td>90-0%</td><td>92-3%</td><td>90-0%</td></tr> <tr><td>92-3%</td><td>90-0%</td><td>92-3%</td><td>90-0%</td><td>91-3%</td><td>90-0%</td><td>91-3%</td><td>90-0%</td></tr> <tr><td>92-0%</td><td>91-0%</td><td>92-0%</td><td>91-0%</td><td>91-0%</td><td>91-0%</td><td>91-0%</td><td>91-0%</td></tr> <tr><td>92-2%</td><td>91-2%</td><td>92-2%</td><td>91-2%</td><td>91-2%</td><td>91-2%</td><td>91-2%</td><td>91-2%</td></tr> </tbody> </table>	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	58-0%	57-0%	86-0%	74-0%	85-0%	87-0%	85-0%	87-0%	93-0%	92-0%	93-0%	92-0%	92-0%	92-0%	92-0%	92-0%	90-0%	89-0%	90-0%	89-0%	89-0%	89-0%	89-0%	89-0%	89-0%	88-0%	89-0%	88-0%	88-0%	88-0%	88-0%	88-0%	94-0%	93-0%	94-0%	93-0%	93-0%	92-0%	93-0%	92-0%	95-2%	93-0%							95-3%	93-3%	95-3%	93-3%	94-3%	93-3%	94-3%	93-3%	50-1%	87-1%	93-1%	87-1%	90-1%	87-1%	90-1%	87-1%	94-40%	93-2%							91-0%	90-0%	91-0%	90-0%	90-0%	90-0%	90-0%	90-0%	93-0%	91-0%	93-0%	91-0%	92-0%	91-0%	92-0%	91-0%	92-0%	91-0%	92-0%	91-0%	91-0%	91-0%	91-0%	91-0%	94-3%	91-0%	94-3%	91-0%	92-3%	90-0%	92-3%	90-0%	92-3%	90-0%	92-3%	90-0%	91-3%	90-0%	91-3%	90-0%	92-0%	91-0%	92-0%	91-0%	91-0%	91-0%	91-0%	91-0%	92-2%	91-2%	92-2%	91-2%	91-2%	91-2%	91-2%	91-2%
Brand	Model	Voltage range	Power	Type																																																																																																																																																																																																																														
ABB	STD 50-3	230/50Hz	60-500	L																																																																																																																																																																																																																														
Altenburger	50,3	230/50Hz																																																																																																																																																																																																																																
AURORA	DSP 400	230/50Hz	400	L																																																																																																																																																																																																																														
Berker	2861	230/50Hz	50-420	U																																																																																																																																																																																																																														
Bticino	L/N/NT4411N	230/50Hz																																																																																																																																																																																																																																
Busch-Jaeger	6513 U-102	230/50Hz	420	T																																																																																																																																																																																																																														
Busch-Jaeger	6523 U-102	230/50Hz	40-420	T																																																																																																																																																																																																																														
Busch-Jaeger	2250 U	230/50Hz	60-600	L																																																																																																																																																																																																																														
Busch-Jaeger	6526 U	230/50Hz																																																																																																																																																																																																																																
CENTURY CONTROL	MULTI DIMMER	230/50Hz	60-600	U																																																																																																																																																																																																																														
DimMax	420SL	230/50Hz	200	L/T																																																																																																																																																																																																																														
DINUY	RE ELI LE1	230/50Hz	400	LED																																																																																																																																																																																																																														
ELKO	400GLI	230/50Hz																																																																																																																																																																																																																																
ELKO	315GLE	230/50Hz	20-315	T																																																																																																																																																																																																																														
ELKO	600GLE/I	230/50Hz																																																																																																																																																																																																																																
ELKO	600GLI	230/50Hz	40-600	U																																																																																																																																																																																																																														
Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps																																																																																																																																																																																																																											
58-0%	57-0%	86-0%	74-0%	85-0%	87-0%	85-0%	87-0%																																																																																																																																																																																																																											
93-0%	92-0%	93-0%	92-0%	92-0%	92-0%	92-0%	92-0%																																																																																																																																																																																																																											
90-0%	89-0%	90-0%	89-0%	89-0%	89-0%	89-0%	89-0%																																																																																																																																																																																																																											
89-0%	88-0%	89-0%	88-0%	88-0%	88-0%	88-0%	88-0%																																																																																																																																																																																																																											
94-0%	93-0%	94-0%	93-0%	93-0%	92-0%	93-0%	92-0%																																																																																																																																																																																																																											
95-2%	93-0%																																																																																																																																																																																																																																	
95-3%	93-3%	95-3%	93-3%	94-3%	93-3%	94-3%	93-3%																																																																																																																																																																																																																											
50-1%	87-1%	93-1%	87-1%	90-1%	87-1%	90-1%	87-1%																																																																																																																																																																																																																											
94-40%	93-2%																																																																																																																																																																																																																																	
91-0%	90-0%	91-0%	90-0%	90-0%	90-0%	90-0%	90-0%																																																																																																																																																																																																																											
93-0%	91-0%	93-0%	91-0%	92-0%	91-0%	92-0%	91-0%																																																																																																																																																																																																																											
92-0%	91-0%	92-0%	91-0%	91-0%	91-0%	91-0%	91-0%																																																																																																																																																																																																																											
94-3%	91-0%	94-3%	91-0%	92-3%	90-0%	92-3%	90-0%																																																																																																																																																																																																																											
92-3%	90-0%	92-3%	90-0%	91-3%	90-0%	91-3%	90-0%																																																																																																																																																																																																																											
92-0%	91-0%	92-0%	91-0%	91-0%	91-0%	91-0%	91-0%																																																																																																																																																																																																																											
92-2%	91-2%	92-2%	91-2%	91-2%	91-2%	91-2%	91-2%																																																																																																																																																																																																																											










Angaben zum Lampentyp

Bewertung der Testergebnisse im Ampelsystem. Beinhaltet sowohl die Lampenanzahl als auch den dimmbaren Bereich





DIMMER COMPATIBILITY CLASSIC A (Heatsink)

Legend					PARATHOM DIM CL A 60	PARATHOM DIM CL A 75	PARATHOM DIM CL A	PARATHOM DIM CL A	PARATHOM DIM CL A			
	Good dimmability with indicated number of lamps (dimming range greater than 75%)				Frosted	Frosted	100 Frosted	150 Frosted	200			
	Limited dimmability with indicated number of lamps (dimming range smaller than 75%)											
	Undesired dimmability				EAN / Basic Code	EAN / Basic Code	EAN / Basic Code	EAN / Basic Code	EAN / Basic Code			
	Not tested				4058075594180 / AC31127	4058075594203 / AC31126	4058075594227 / AC31125	4058075594241 / AC31128	4058075659704 / AC36027			
Dimmer					Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps
Brand	Model	Voltage range	Power	Type								
2001	63533	230/50Hz	29.08	T								
2007	63533	230/50Hz	24.08	T								
ABB	STD 50-3	230/50Hz	60-500	L	99-4%	99-4%	99-5%	98-5%	95-27%	95-27%		
Altenburger	50_3	230/50Hz						99-0%	96-23%			
AURORA	DSP 400	230/50Hz	400	L	98-0%	98-0%	99-0%	98-0%				95-11%
Berker	2861	230/50Hz	50-420	U					96-33%	96-31%	99-36%	
Bticino	L/N/NT4411N	230/50Hz			100-0%	100-0%	100-0%	100-0%	97-1%	97-1%	100-2%	91-2%
Bticino	L/N/NT4408	230/50Hz					99-0%	99-0%				
bticino	NT4402N	230/50Hz	500	R					97-12%			91-5%
Busch-Jaeger	6513 U-102	230/50Hz	420	T	100-0%	100-0%	100-0%	100-0%				100-20%
Busch-Jaeger	6523 U-102	230/50Hz	40-420	T								95-20%
Busch-Jaeger	2250 U	230/50Hz	60-600	L	98-0%	99-0%	99-0%	99-0%	92-1%	96-1%		91-0%
Busch-Jaeger	6526 U	230/50Hz										
CENTURY CONTROL	MULTI DIMMER	230/50Hz	60-600	U	99-0%		99-0%	99-0%	97-1%	97-1%	100-0%	98-0%
DimMax	420 SL	230/50Hz	200	L/T		99-0%	99-0%	99-0%	96-3%	96-1%	100-5%	99-5%
DINUY	RE EL1 LE1	230/50Hz	400	LED	99-0%	99-0%	99-0%	99-0%	96-1%	96-1%	99-0%	100-0%
ELKO	400GLI	230/50Hz										75-0%
ELKO	315GLE	230/50Hz	20-315	T	100-0%	100-0%	99-0%	100-0%	96-5%	96-5%	100-8%	100-5%
ELKO	600GLE/I	230/50Hz			100-0%	100-0%	100-0%	100-0%	97-0%	97-3%		95-11%
ELKO	600GLI	230/50Hz	40-600	U	99-0%		99-0%	99-1%	97-1%		100-20%	
ELKO	420GLE/I	230/50Hz	40-420	U	99-0%	100-0%	100-0%	99-0%	96-0%	96-0%	100-1%	
ELKO	1000LRI	230/50Hz			99-0%		99-0%	99-0%	95-1%	95-1%		95-0%
ELKO	630GLE	230/50Hz	20-630	U	93-4%		95-5%	99-0%	96-25%	96-21%	99-29%	99-25%
Eltako	EUD61NPN-UC	230/50Hz	5-400	R / L / C	99-0%	99-0%	99-0%	100-0%	98-1%	99-1%		95-5%
Feller	40200.LEDxxx	230/50Hz				79-0%		99-0%	95-22%	95-21%	100-27%	100-25%
Feller	40600.RLC	230/50Hz	20-600	U	100-0%	100-0%	100-0%	100-0%	97-0%	97-3%		95-11%
Feller	40600.RC	230/50Hz			93-4%		95-5%	99-0%	96-25%	96-21%	99-29%	99-25%
Feller	40600.RL	230/50Hz			99-0%		99-0%	99-1%	97-1%		100-20%	
Feller	40420.RLC	230/50Hz			99-0%	100-0%	100-0%	99-0%	96-0%	96-0%	100-1%	
Feller	31000	230/50Hz			99-0%		99-0%	99-0%	95-1%	95-1%		95-0%
Gira	226200	230/50Hz			100-0%	100-0%	100-0%	98-0%	94-1%	96-1%		91-0%
Gira	030700	230/50Hz	20-525	T	100-0%	98-0%	100-0%	99-0%	96-27%	96-21%	100-31%	100-25%
Gira	117600	230/50Hz	50-420	U		100-4%						
Gira	238500	230/50Hz					100-0%	100-0%		96-1%	100-0%	100-0%
Gira	217400	230/50Hz	4X20-250	KNX-U	99-35%	99-0%	99-38%	99-0%	97-19%	98-0%	100-22%	100-0%
Hager	WUD87	230/50Hz	400	LED-U	99-0%	99-0%	100-0%	99-1%	95-23%	95-15%	100-25%	100-19%
Hamilton	KP1X40	230/50Hz	400									
Hugo Müller	paladin 872110 led	230/50Hz			99-0%	99-0%	99-0%	99-0%	96-1%	96-1%	99-0%	100-0%
Jung	225 NVDE	230/50Hz	20-500	L	100-0%	100-0%	100-0%	98-0%	94-1%	96-1%		91-0%
Jung	225 TDE	230/50Hz			100-0%	98-0%	100-0%	99-0%	96-27%	96-21%	100-31%	100-25%
Jung	254 UDIE1	230/50Hz				100-4%						
Jung	1224 LEDUDE	230/50Hz		LED			100-0%	100-0%		96-1%	100-0%	100-0%
Jung	3904 REGHE	230/50Hz			99-35%	99-0%	99-38%	99-0%	97-19%	98-0%	100-22%	100-0%

DIMMER COMPATIBILITY CLASSIC A (Heatsink)

Legend					PARATHOM DIM CL A 60	PARATHOM DIM CL A 75	PARATHOM DIM CL A 100	PARATHOM DIM CL A 150	PARATHOM DIM CL A 200			
	Good dimmability with indicated number of lamps (dimming range greater than 75%)											
	Limited dimmability with indicated number of lamps (dimming range smaller than 75%)											
	Undesired dimmability											
	Not tested											
					EAN / Basic Code	EAN / Basic Code	EAN / Basic Code	EAN / Basic Code	EAN / Basic Code			
					4058075594180 / AC31127	4058075594203 / AC31126	4058075594227 / AC31125	4058075594241 / AC31128	4058075659704 / AC36027			
Dimmer					Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps
Brand	Model	Voltage range	Power	Type								
Legrand	665114	230/50Hz	400	U	100-0%	100-0%	100-0%	100-0%	97-1%	97-1%	100-2%	91-2%
Legrand	574319/574339	230/50Hz	400	U	100-0%	100-0%	100-0%	100-0%	97-1%	97-1%	100-2%	91-2%
Legrand	572239/572739	230/50Hz	400	U	100-0%	100-0%	100-0%	100-0%	97-1%	97-1%	100-2%	91-2%
Legrand	078407/079207	230/50Hz	400	U	100-0%	100-0%	100-0%	100-0%	97-1%	97-1%	100-2%	91-2%
Legrand	048869/048871	230/50Hz	400	U	100-0%	100-0%	100-0%	100-0%	97-1%	97-1%	100-2%	91-2%
Legrand	067083/048869	230/50Hz	400	U	100-0%	100-0%	100-0%	100-0%	97-1%	97-1%	100-2%	91-2%
Legrand	770061	230/50Hz	400	RL								
Legrand	099314	230/50Hz	300	RL								
Legrand	770062	230/50Hz	400	RLC	99-0%	99-0%	99-0%	99-0%	95-1%	95-1%	100-1%	
Legrand	078405	230/50Hz	600	RL			99-0%	99-0%				
MASTER	DM-DGL	230/50Hz	1000	U / LED			99-43%					
MASTER	DM-2500	230/50Hz	2500	U / LED	99-0%	99-0%	99-0%	99-0%	98-1%	98-1%		95-0%
Merten	MEG5136-0000	230/50Hz			100-0%	100-0%	99-0%	100-0%	96-5%	96-5%	100-8%	100-5%
Merten	MEG5134-0000	230/50Hz				79-0%		99-0%	95-22%	95-21%	100-27%	100-25%
Merten	MEG5139-0000	230/50Hz			100-0%	100-0%	100-0%	100-0%	97-0%	97-3%		95-11%
Merten	MEG5137-0000	230/50Hz			93-4%		95-5%	99-0%	96-25%	96-21%	99-29%	99-25%
Merten	MEG5133-0000	230/50Hz			99-0%		99-0%	99-1%	97-1%		100-20%	
Merten	MEG5138-0000	230/50Hz			99-0%	100-0%	100-0%	99-0%	96-0%	96-0%	100-1%	95-0%
Merten	MEG 5170-0300	230/50Hz	10-200	U		67-2%		99-0%	96-26%	94-23%	99-30%	99-26%
Merten	MEG 5131	230/50Hz	40-400	L	100-0%	99-0%	100-0%	98-0%	97-0%	95-0%		95-0%
Merten	MEG 5132	230/50Hz			100-0%	99-0%	100-0%	98-0%	97-0%	95-0%		95-0%
Merten	MEG 5140	230/50Hz	9-100	L	100-0%	99-0%	100-0%	100-0%	96-0%		100-0%	100-0%
Merten	MEG 5135	230/50Hz	60-1000	L	99-0%		99-0%	99-0%	95-1%	95-1%		95-0%
MK	K4501	230/50Hz	180	L	99-0%	99-0%	100-0%	100-0%	97-4%	97-4%	100-9%	100-5%
NEXUS	881P-01	230/50Hz	400	L	99-0%	99-0%	99-0%	99-0%				95-0%
NIKO	310-01900	230/50Hz	5-200	U	99-0%	99-0%	99-0%	99-0%	98-3%	98-1%		95-0%
NIKO	330-00700	230/50Hz	5-200	U	99-0%	99-0%	99-0%	99-0%	96-8%	96-1%	99-10%	99-10%
Odace	S520512	230/50Hz				79-0%		99-0%	95-22%	95-21%	100-27%	100-25%
Odace	S520511	230/50Hz			99-0%		99-0%	99-1%	97-1%		100-20%	
Odace	S520515	230/50Hz			99-0%	100-0%	100-0%	99-0%	96-0%	96-0%	100-1%	95-0%
Odace	S520518	230/50Hz			100-0%	99-0%	100-0%	100-0%	96-0%		100-0%	100-0%
Osram	HTI DALI 315 DIM	230/50Hz	20-315	DALI-T	100-0%	100-0%	100-0%	99-0%	95-9%	95-1%	100-0%	100-13%
PEHA	435 HAN	230/50Hz	60-600	L	99-0%	99-0%	100-0%	100-0%			86-6%	100-11%
Schneider	400GLI	230/50Hz	40-400	T								75-0%
Schneider	SBD315RC	230/50Hz			100-0%	100-0%	99-0%	100-0%	96-5%	96-5%	100-8%	100-5%
Schneider	SBD200LED	230/50Hz	400			79-0%		99-0%	95-22%	95-21%	100-27%	100-25%
Schneider	SBD600RCRL	230/50Hz			100-0%	100-0%	100-0%	100-0%	97-0%	97-3%		95-11%
Schneider	SBD630RC	230/50Hz			93-4%		95-5%	99-0%	96-25%	96-21%	99-29%	99-25%
Schneider	SBD600RL	230/50Hz			99-0%		99-0%	99-1%	97-1%		100-20%	
Schneider	SBD420RCRL	230/50Hz			99-0%	100-0%	100-0%	99-0%	96-0%	96-0%	100-1%	95-0%
Schneider	5170	230/50Hz				67-2%		99-0%	96-26%	94-23%	99-30%	99-26%
Schneider	SBD400RL	230/50Hz			100-0%	99-0%	100-0%	98-0%	97-0%	95-0%		95-0%
Schneider	SBD5PL	230/50Hz			100-0%	99-0%	100-0%	100-0%	96-0%		100-0%	100-0%
Schneider	ATTD1000RL	230/50Hz			99-0%		99-0%	99-0%	95-1%	95-1%		95-0%

DIMMER COMPATIBILITY CLASSIC A (Heatsink)

Legend					PARATHOM DIM CL A 60	PARATHOM DIM CL A 75	PARATHOM DIM CL A 100	PARATHOM DIM CL A 150	PARATHOM DIM CL A 200			
Good dimmability with indicated number of lamps (dimming range greater than 75%)					Frosted		100 Frosted		150 Frosted		200	
Limited dimmability with indicated number of lamps (dimming range smaller than 75%)												
Undesired dimmability					EAN / Basic Code		EAN / Basic Code		EAN / Basic Code		EAN / Basic Code	
Not tested					4058075594180 / AC31127		4058075594203 / AC31126		4058075594227 / AC31125		4058075594241 / AC31128	
4058075594180 / AC31127					4058075594203 / AC31126		4058075594227 / AC31125		4058075594241 / AC31128		4058075659704 / AC36027	
Dimmer					Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps
Brand	Model	Voltage range	Power	Type								
Shuttle	SDIM-T-LED-500W	230/50Hz	2-500	T & LED-T	99-0%	99-0%	99-0%	99-0%	96-5%	100-5%	100-6%	95-5%
Siemens	5TC8 284	230/50Hz	20-525	T	100-2%	99-0%	99-2%	99-0%	95-7%	95-13%	98-13%	99-9%
Siemens	5WG1-528-1AB31	230/50Hz	20-500	KNX-U	99-0%	99-0%	99-0%	99-0%	99-1%	99-1%	98-0%	100-0%
theben	DIMAX 544 plus P	230/50Hz	250	T	96-0%	96-0%	99-0%	100-0%	100-16%	100-15%	100-20%	99-19%
theben	DIMAX 534 plus	230/50Hz	400	T	99-0%	99-0%	99-0%	99-0%	97-0%	97-0%	99-0%	99-0%
VADSBO	LD 220	230/50Hz	1-200	U	99-0%	99-0%	99-0%	99-0%	95-1%	96-1%	99-0%	100-0%
VARILIGHT	HQ3W	230/50Hz	400		81-0%	62-0%	94-0%	78-0%	94-4%	94-3%	100-9%	100-4%
VARILIGHT	JQP401W	230/50Hz	400	T	97-0%	97-0%	89-0%	97-0%				91-5%
Vimar	20135	230/50Hz	3 - 100	U	99-0%	99-0%	99-0%	99-0%	98-4%	96-3%	100-6%	100-5%
ZANO	WH401	230/50Hz	400	L	95-0%	98-0%	98-0%	98-0%		94-0%		
ZANO	WH251	230/50Hz	250		97-0%	98-0%	98-0%	98-0%				
ZANO	Z GRID 200	230/50Hz	250	T								98-0%
ZANO	Z GRID 700	230/50Hz	250	LED								
ZANO	Z GRID 500	230/50Hz	500		99-0%	99-0%	99-0%	99-0%				95-0%

Please note:

- The compatibility list is based upon testing conducted by the manufacturer in a lab simulated environment, and the results can vary in certain field applications due to a number of factors. LEDVANCE does not take over any responsibility, warranty or liability that this results can also be achieved by using the devices under other conditions, or when using successor models of the tested devices, or different models of the same manufacturer, or when using other LED lamp types.
- The absence of a dimmer from this chart does not necessarily imply incompatibility.
- Please reference the dimmer manufacturer's instructions for installation.
- LED lamps contain several electronic components. Under unfavourable conditions these can lead to acoustic noise. In case of resonance even low noise can cause audible effect. Possible factors influencing this are the installation, the design of the lamp holder and the luminaire (acoustic resonance effect) as well as the dimmer or the transformer (harmonic or electronic resonance).
- Subject to change without notice.
- Errors and omission excepted.
- Always make sure to use the most recent release.

Application Notes:

- For best dimming results trailing edge dimmer type is recommended.
- Trailing edge type dimmer requires the neutral wire for installation.

LEDVANCE GmbH

Head Office:

Parkring 33
85748 Garching, Germany
Phone +49 89 780673-100
Fax +49 89 780673-XXX
www.ledvance.com

Bitte beachten:

- Die Kompatibilitätsliste basiert auf Tests, die der Hersteller in einer im Labor simulierten Umgebung durchgeführt hat. Die Ergebnisse können aufgrund verschiedener Faktoren in manchen Praxisanwendungen abweichen. LEDVANCE übernimmt keinerlei Verantwortung, Garantie oder Haftung dafür, dass diese Ergebnisse tatsächlich mit den Geräten unter anderen Bedingungen, mit Nachfolgemodellen der getesteten Geräte, mit anderen Modellen desselben Herstellers oder bei Verwendung anderer LED-Lampentypen erreicht werden.
- Das Fehlen eines Dimmers in der Abbildung bedeutet nicht, dass ein Dimmer nicht kompatibel ist.
- Lesen Sie stets die Installationsanweisungen des Dimmerherstellers.
- LED-Lampen bestehen aus mehreren elektronischen Komponenten. Unter ungünstigen Bedingungen können diese Störgeräusche erzeugen. Im Resonanzfall können selbst geringe Geräusche einen hörbaren Effekt hervorrufen. Einflussfaktoren können die Installation, die Gestaltung des Lampenträgers, die Leuchte (akustischer Resonanzeffekt), der Dimmer oder der Trafo (Oberschwingungen oder elektronische Resonanz) sein.
- Änderungen vorbehalten.
- Irrtümer und Auslassungen vorbehalten.
- Vergewissern Sie sich, dass Sie stets die aktuellste Version benutzen.

Anwendungshinweis:

- Um bestmögliche Dimmerergebnisse zu erzielen, wird die Verwendung von Phasenabschnitt-Dimmern empfohlen.
- Phasenabschnitt-Dimmer erfordern bei der Installation einen Neutralleiter.