


LED VALUE MULTIPOWER FLOOD LIGHT



Description	W	L x W x H (mm)	IP	Projected Area	Input Current	V _{AC}	Hz	👤
V-FL-210/250/300W -XXD-WV-8YY	300	430x433x107	66	0.145m ²	210W: 0.88-2.3A 250W: 0.99-2.6A 300W: 1.2-3.2A	100-277V	50/60Hz	6.6Kg
V-FL-330/420/500W -XXD-WV-8YY	500	578x476x107	66	0.218m ²	330W: 1.32-3.4A 420W: 1.68-4.5A 500W: 1.9-5.3A	100-277V	50/60Hz	9.6Kg

* XX represents beam angle, It could be 30° 60° 120°90°;
YY represents color temperature, It could be 4000K 6500K.

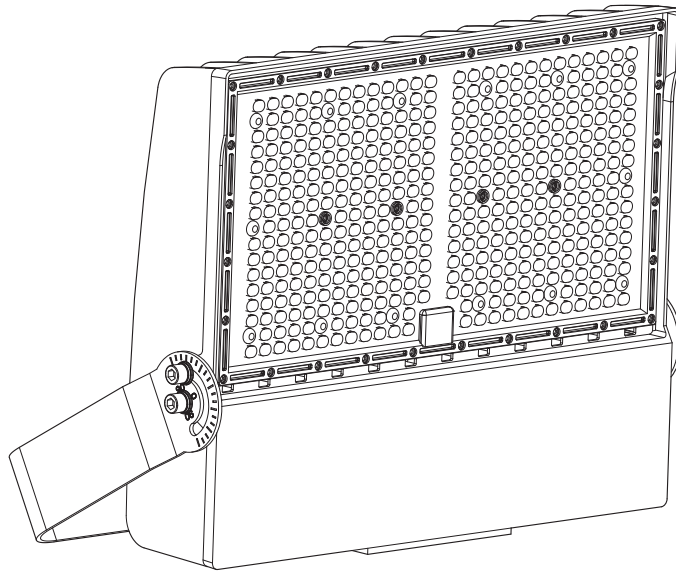


SMD
LED

50000h



LEDVANCE


LED VALUE MULTIPOWER FLOODLIGHT

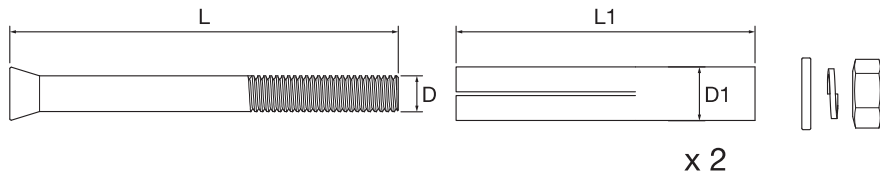


Description	D	D1	L	L1
V-FL-210/250/300W -XXD-WV-8YY	M10	14	80	70
V-FL-330/420/500W -XXD-WV-8YY	M10	14	80	70

The screw bolts are not included in package


1

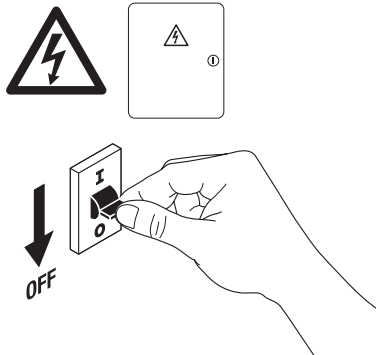


2

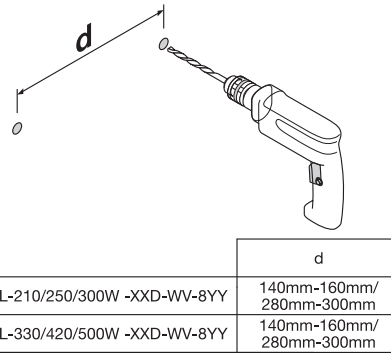

3

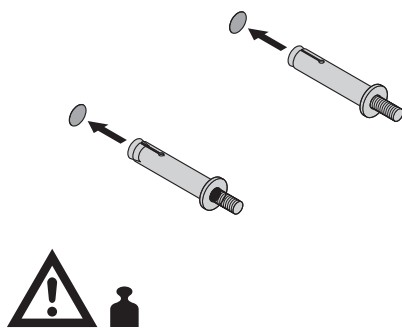

4

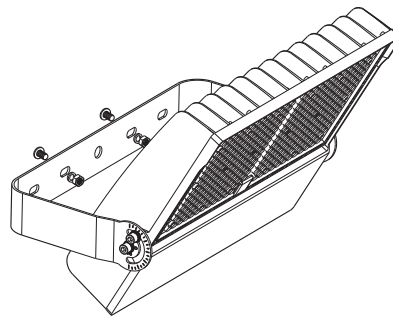


LED VALUE MULTIPOWER FLOODLIGHT

5a



5b

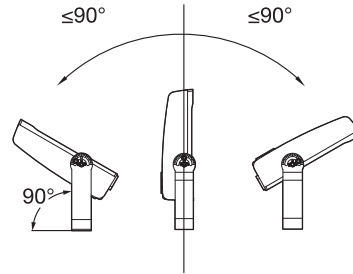


5c




	N/M
V-FL-210/250/300W -XXD-WV-8YY	26.0
V-FL-330/420/500W -XXD-WV-8YY	26.0


5d-1

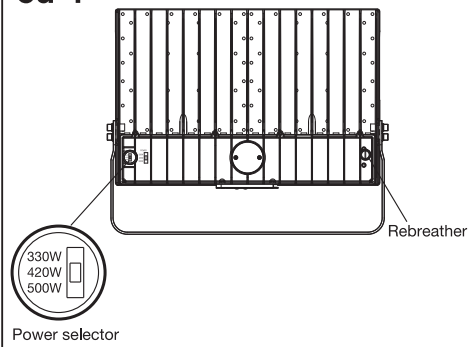

5d-2

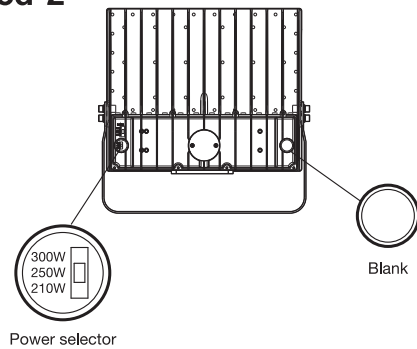

6

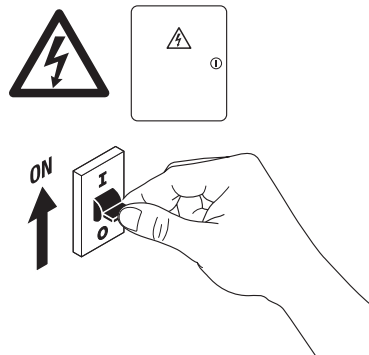

Maximum connection in one circuit breaker									
Model	Type	B32	B25	B16	B10	C32	C25	C16	C10
V-FL-330/420/500W -XXD-WV-8YY		5	4	2	1	5	4	2	1
V-FL-210/250/300W -XXD-WV-8YY		9	7	4	3	9	7	4	3



WARNING:

- The external flexible cord of this luminaire cannot be replaced. If the flexible cord is damage, the lamp should be scrapped.
- Do not touch the luminaire in operative status.
- The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.
- Range mounting height 25m max.
- Only installed outside the arm's reach.
- Suitable for indoors and outdoors.
- Caution, risk of electric shock.
- Please note that the fixture is equipped with standard surge protection only. To protect the fixture from sags, surges, and lightning strikes, additional surge protectors must be deployed on the primary side.



تحذير

- لا يمكن استبدال السلك المرن الخارجي لهذا الضوء، في حالة تلف السلك المرن ، يجب تغير المصباح بالكامل
- لا تلمس الكنتاف في وضع التشغيل
- في حالة تلف كابل التوصيل لهذا المنتج رجاء التوقف عن إستعماله و أستشارة الشركة المصنعة
- مستوى ارتفاع التثبيت 25 متر بحد أقصى
- يثبت فقط بعيدا عن مستوى وصول الذراع
- مناسب للأستخدام الداخلي و الخارجي
- ملاحظة: وحدة الإضاءة هذه مزودة بحماية من نبضات الفولتية اللحظية المرتفعة حسب المواصفات المعتمدة عالميا



LEDVANCE Pte. Ltd.
320 Serangoon Road #14-02,
Centrium Square 218108, Singapore.
Phone +65 6911 8260

LEDVANCE Sdn, Bhd, (1166537-U)
100.7.009, 129 Offices, Block J, Jaya One
No. 72A, Jalan Universiti,
46200 Petaling Jaya,
Selangor Darul Ehsan, Malaysia

LEDVANCE Prosperity Co., Ltd.
20/F Cornell Centre, 50 Wing Tai Rd.,
Chai Wan, Hong Kong

LEDVANCE Pvt. Ltd.,
1201 – 1202, 12th Floor, Signature Towers, Tower – A,
South City –I, Gurugram – 122001, Haryana (India)
Consumer care cell (Name and address as per above),
Consumer care Tel.No. 0124-4150100
Toll Free Number – 18001026258
E-mail Id: customercare@ledvance.com
www.ledvance.in

(주)레드밴스
서울시 강남구 삼성로 554 예성빌딩 6층
(우편번호 06165)
전화번호: +82 80 489 1700
www.ledvance.co.kr

LEDVANCE MIDDLE EAST FZE
Office No. LB040123
PO Box 17476, Jebel Ali Free Zone
Dubai, United Arab Emirates
Tel.: +971 4 881 37 67 | Fax: +971 4 881 37 69

LEDVANCE Pty Ltd
ABN 34 050 103 181
Unit 3, 83 Derby Street Silverwater,
NSW, 2128, Australia
Ph +61 29481 8399 / 1300 467 726
www.ledvance.com.au

IP66 IK08



Standard:
IEC 60598-1, IEC 60598-2-5
CISPR 15, IEC 61000-3-2



C10449057
G11179685
2023-10-24

www.ledvance.com