

# PRODUCT DATASHEET

## SPOT VARIO DN 170 35 W 3000 K 24DEG WT

SPOT VARIO | Recessed mounted spotlight, swivelable



### Areas of application

- Accent- and general lighting for all kind of salesrooms
- Retail
- Supermarkets
- Shops, boutiques
- Hotel rooms
- Stairways
- Corridors
- Lobbies

### Product benefits

- Low flicker light thanks to special electronic control gear
- High luminous efficacy
- Die-cast aluminum housing for improved heat dissipation
- Easy replacement of external driver thanks to plug with bayonet lock
- Design matches the LEDVANCE Spot-, Down- and Tracklight luminaire family
- Shallow mounting depth
- Various options to highlight target areas
- 5 years guarantee

### Product features



- Large faceted reflector for high light output
- Beam angle: 24°
- Rotation angle: 0°...350°, tilt angle: 0°...35°
- Diameter of required ceiling cut out: 165...170 mm


## TECHNICAL DATA

### Electrical data


Nominal wattage	35.00 W
Nominal voltage	220...240 V
Mains frequency	50...60 Hz
Nominal current	850 mA
Inrush current	40 A
Inrush current time $T_{h50}$	100 $\mu$ s
Max. number of luminaires per miniature circuit breaker B16	15
Max. number of luminaires per miniature circuit breaker C10	9
Max. number of luminaires per miniature circuit breaker C16	15
Power factor $\lambda$	> 0.90
Total harmonic distortion	20 %
Protection class	II
Operating mode	External LED driver

### Photometrical data

Luminous flux	3350 lm
Luminous efficacy	95 lm/W
Color temperature	3000 K
Light color (designation)	Warm White
Color rendering index Ra	> 80
Standard deviation of color matching	< 5 sdc <sub>m</sub>
Luminous intensity	-
Low flicker	Yes
Flickering metric (Pst LM)	-
Stroboscope effect metric (SVM)	-
Photobiological safety group acc. to EN62778	RG1
Beam angle	24 °

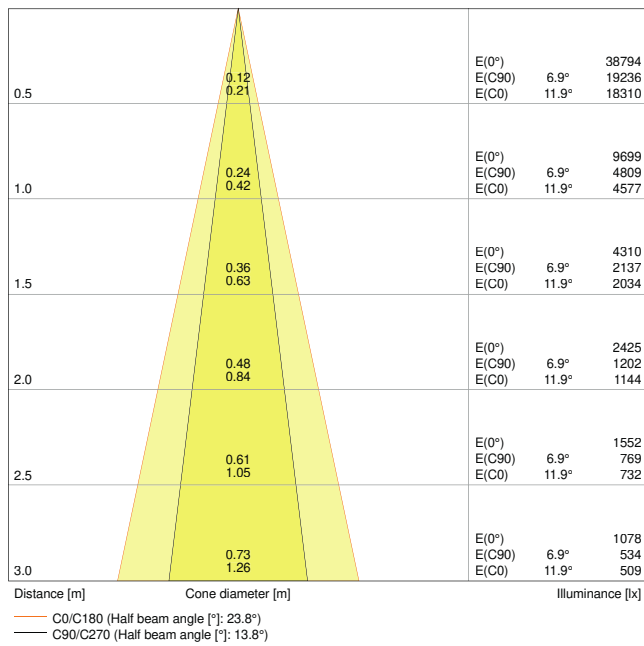


SP VARIO DN170 35W3000K 24DEG WT

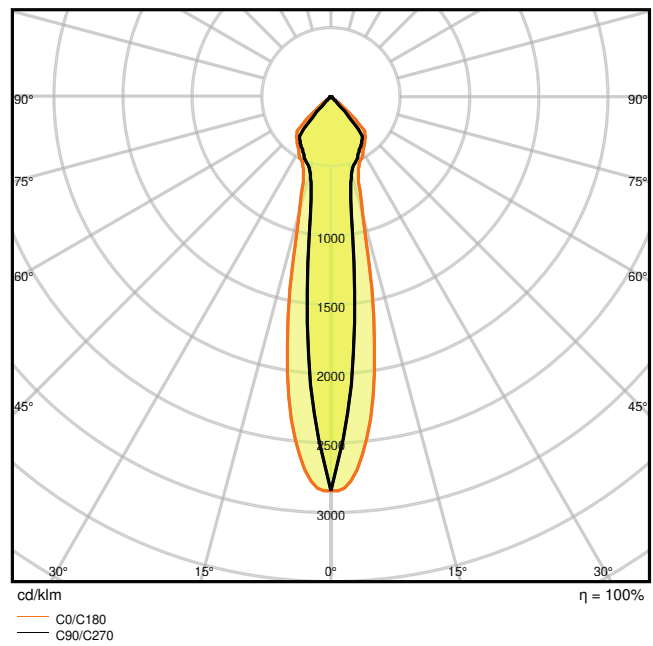

SP VARIO DN170 35W3000K 24DEG WT

Dimensions & Weight

Diameter	180.00 mm
Height	129.00 mm
Product weight	1126.00 g



SP VARIO DN170 35W WT

Materials & Colors

Product color	White
Housing color	White
Body material	Aluminum

Cover material	Polymethylmethacrylate (PMMA)
Glow Wire Test according to IEC 60695-2-12	650 °C
Mercury content	0.0 mg

### Application & Mounting

Ambient temperature range	-20...+45 °C
Type of connection	Screw terminal, 2-Pole (L,N)
Type of protection	IP20
Protection class IK (shock resistance)	IK03
Dimmable	No
Mounting type	Recessed
Mounting location	Ceiling
Application environment	Indoor
Mounting diameter	170 mm
Mounting depth	150 mm
Adjustable	Yes
With light source	Yes

### Lifespan

Lifespan L70/B50 at 25 °C	50000 h <sup>1)</sup>
Lifespan L80/B10 at 25 °C	45000 h <sup>1)</sup>
Lifespan L80/B50 at 25 °C	45000 h
Lifespan L90/B10 at 25 °C	30000 h
Number of switching cycles	50000

<sup>1)</sup> t[h]: L70 / B50 @ 25 °C (Ta), t[h]: L80 / B10 @ 25 °C (Ta), t[h]: L90 / B10 @ 25 °C (Ta)

### Control gear

ECG - Length	153 mm
ECG - Width	44 mm
ECG - Height	31 mm

### Certificates & Standards

Standards	CE / CB / ENEC / TÜV SÜD / RoHS
Luminaire with limited surface temperature, "D sign"	No
Ball shot safe	No
Replaceable light source (EPREL)	Not replaceable














## EQUIPMENT / ACCESSORIES




- Driver included

## Safety advice

- All electrical connections must be made by a qualified person.
- Caution, risk of electric shock.
- The luminaires are not suitable for covering with thermally insulated material.

## DOWNLOAD DATA

Documents and certificates		Document name
	User instruction / safety instructions	SP VARIO DN170
	Legal information	LSI_SP VARIO DN170
	Legal information	SP VARIO DN170
	Legal information	Informationstext 18 Abs 4 ElektroG
	Declarations of conformity	EU Declaration of Conformity SP Vario DN 170 35W LEDV
	Declarations of conformity	Attestation-of-Conformity Spot Vario TÜV
	Declarations of conformity UKCA	SP VARIO DN170 35W 24DEG WT
Photometric and lighting design files		Document name
	IES file (IES)	SP VARIO DN170 35W3000K 24DEG WT
	LDT file (Eulumdat)	SP VARIO DN170 35W3000K 24DEG WT
	ULD file (DIALux)	SPOTVARIO17035W3000K24DEGWT
	ROLF file (RELUX)	SP VARIO DN170 35W-3000K
	UGR file (UGR table)	SP VARIO DN170 35W3000K 24DEG WT
	Light distribution curve type cone	SP VARIO DN170 35W3000K 24DEG WT





Photometric and lighting design files		Document name
	Light distribution curve type polar	SP VARIO DN170 35W3000K 24DEG WT
CAD/BIM files		Document name
	BIM Revit 3D	SpotVARIO
	CAD STEP 3D	Spot Vario

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075104020	Folding box 1	200 mm x 200 mm x 150 mm	1204.00 g	6.00 dm <sup>3</sup>
4058075104037	Shipping box 4	415 mm x 215 mm x 320 mm	5560.00 g	28.55 dm <sup>3</sup>

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

ADDITIONAL CATALOG INFORMATION



References / Links

– For Guarantee see [www.ledvance.com/guarantee](http://www.ledvance.com/guarantee)

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.