

# PRODUCT DATASHEET

## LED WALL WASHER 9 W 4000 K 45 ° 500 mm

LED WALL WASHER | LED floodlight luminaires

---

### Areas of application

- Architectural lighting
- Facade lighting



---

### Product benefits

- Prewired plug connector (male/female) for easy installation
- High quality lens made of polycarbonate (PC), secondary optics with tempered glass cover
- Flexibility and convenience in use thanks to adjustable mounting bracket

---

### Product features

- Extruded aluminum housing and die-cast aluminum end caps
- Available in two lengths: 500 mm and 1000 mm
- Available with color temperature: 3,000 K, 4,000 K
- Input voltage: 24 V<sub>DC</sub>
- Initial color consistency: < 5 SDCM
- Luminaire efficacy: up to 80 lm/W
- Color rendering index R<sub>a</sub>: ≥ 80



- Type of protection: IP66
- Impact resistance: IK05
- Lifetime (L70/B50): up to 30,000 h
- With CQC certificate
- Certificate: CB

## TECHNICAL DATA

### Electrical data


Nominal wattage	9.00 W
Nominal voltage	24 V
Nominal current	375.000 mA
Protection class	III

### Photometrical data

Luminous flux	720 lm
Luminous efficacy	80 lm/W
Color temperature	4000 K
Light color (designation)	Cool White
Color rendering index Ra	80
Standard deviation of color matching	≤5 sdc <sub>m</sub>
Beam angle	45 °

### Dimensions & Weight

Length	500.00 mm
Width	35.00 mm
Height	53.00 mm
Product weight	700.00 g
Cable length	200 mm

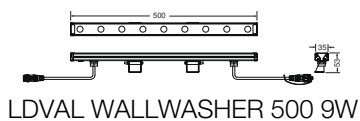

### Materials & Colors

Product color	Silver
Housing color	Silver
Body material	Glass Aluminum
Cover material	CLEAR GLASS

### Application & Mounting

Ambient temperature range	-20...+50 °C
Temperature range at storage	-20...+70 °C
Type of connection	Plug, quick disconnect
Type of protection	IP66
Protection class IK (shock resistance)	IK05
Dimmable	No
Mounting type	Surface
Mounting location	Wall
Application environment	Outdoor

### Lifespan

Lifespan L70/B50 at 25 °C	30000 h <sup>1)</sup>
Number of switching cycles	30000

<sup>1)</sup> t[h]: L70 / B50 @ 25 °C (Ta), t[h]: L80 / B10 @ 25 °C (Ta), t[h]: L90 / B10 @ 25 °C (Ta)

### Certificates & Standards

Replaceable light source (EPREL)	Not replaceable
----------------------------------	-----------------

### LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075334359	Folding box 1	510 mm x 55 mm x 50 mm	792.00 g	1.40 dm <sup>3</sup>
4058075334366	Shipping box 9	530 mm x 185 mm x 180 mm	7630.00 g	17.65 dm <sup>3</sup>

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

### DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.