

# PRODUCT DATASHEET

## ECO CLASS RECIRCULATOR UVC 2X15W WT K

ECO CLASS RECIRCULATOR PASSIVE | Fully shielded germicidal UV-irradiator for ceiling mounting



### Areas of application

- Reception areas
- Hotels
- Production and assembly facilities
- Offices
- Shops

### Product benefits

- Constant air disinfection
- Safe, reliable and silent
- 3 years guarantee

### Product features

- Housing dedicated to T8 UVC G13
- Both UVC tubes are shielded
- Equipped with ozoneless UV tubes
- Simple and reliable - no complex components inside
- Ceiling mounting



TECHNICAL DATA

Electrical data


Nominal wattage	30.00 W
Nominal voltage	220...240 V
Mains frequency	50...60 Hz
Nominal current	135.000 mA
Max. number of luminaires per miniature circuit breaker B16	13
Max. number of luminaires per miniature circuit breaker C10	14
Max. number of luminaires per miniature circuit breaker C16	23
Power factor $\lambda$	0.95
Protection class	I
Operating mode	Electronic control gear (ECG)

Photometrical data

Photobiological safety group acc. to EN62778	RG3
Photobiological safety group acc. to EN62471	RG3

Dimensions & Weight

Length	481.00 mm
Width	120.00 mm
Height	80.00 mm
Product weight	1900.00 g

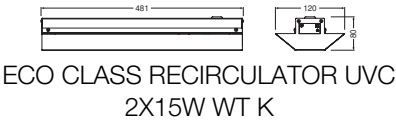

Materials & Colors

Product color	White
Housing color	White
Body material	Steel
Mercury content	5.0 mg

Application & Mounting

Type of connection	Terminal
Type of protection	IP20
Dimmable	No
Mounting type	Surface
Mounting location	Ceiling
Application environment	Indoor
With light source	Yes
Holder designation	G13

### Control gear

ECG - Output voltage	48 V
Output current	313 mA
ECG - Length	238 mm
ECG - Width	36 mm
ECG - Height	30 mm

### Additional product data

Number of illuminants	2
-----------------------	---

## EQUIPMENT / ACCESSORIES

- Equipped with electronic control gear

## LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075533776	Shipping box 1	593 mm x 196 mm x 104 mm	2184.00 g	12.09 dm <sup>3</sup>

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

## References / Links

- For Guarantee see [www.ledvance.com/guarantee](http://www.ledvance.com/guarantee)

## DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.